
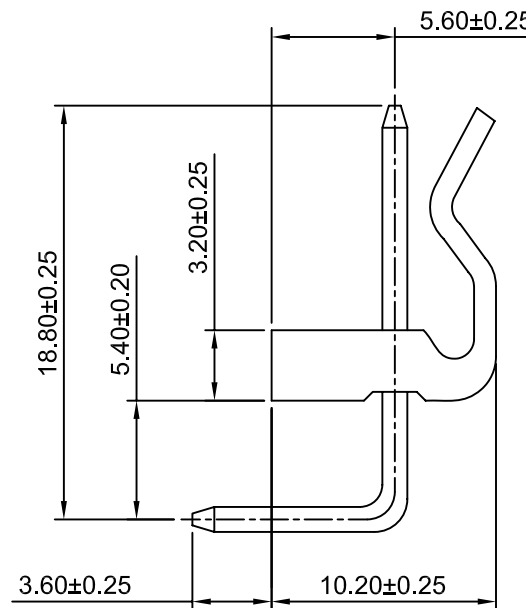
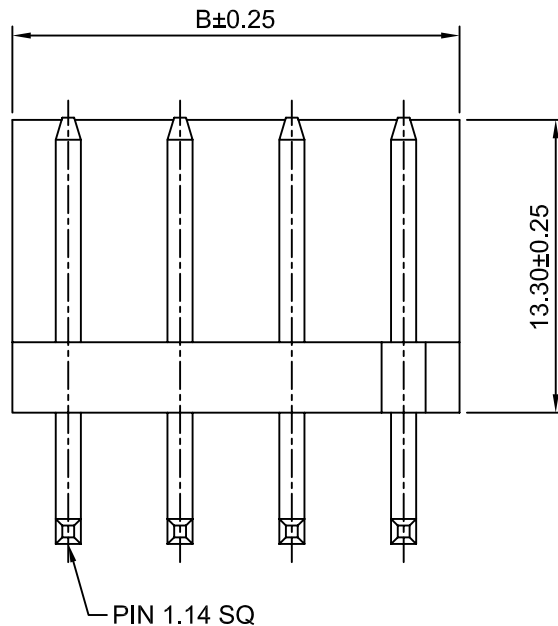
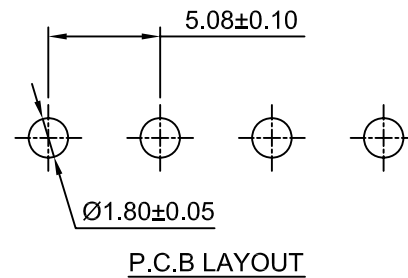


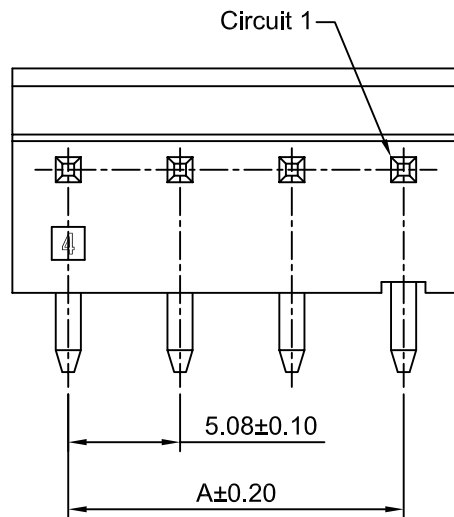

Ordering Information:

A5081WR-XP - **
1 2

1:Part No.

2:Color:

(blank):Natural


BK:Black

RD :Red

BL:Blue

YL:Yellow

GN:Green

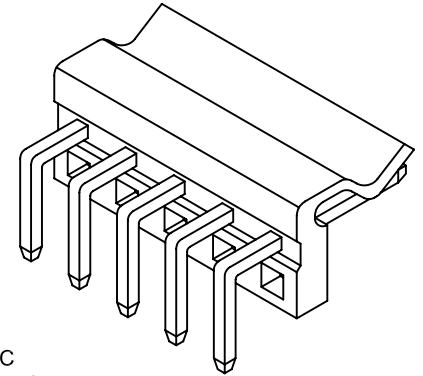

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.08	10.16	12P	55.88	60.96
3P	10.16	15.24	13P	60.96	66.04
4P	15.24	20.32	14P	66.04	71.12
5P	20.32	25.40	15P	71.12	76.20
6P	25.40	30.48	16P	76.20	81.28
7P	30.48	35.56	17P	81.28	86.36
8P	35.56	40.64	18P	86.36	91.44
9P	40.64	45.72	19P	91.44	96.52
10P	45.72	50.80	20P	96.52	101.60
11P	50.80	55.88			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 3:1, Sheet: 1 of 1

Draw BY: LIZQ, Approved: GONGYB

General Tolerance

x.xx±0.25, x.xxx±0.20, x.xxx±0.15, ANGLE±

Title :

5.08mm PITCH

90° WAFER

DRAW NO : A5081WR-XP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10