
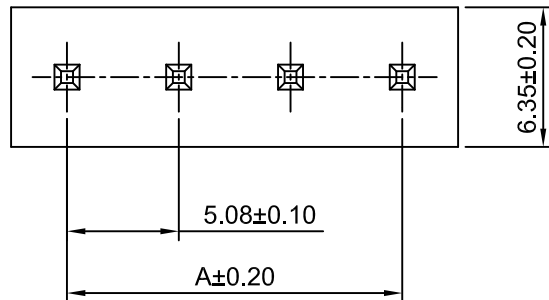
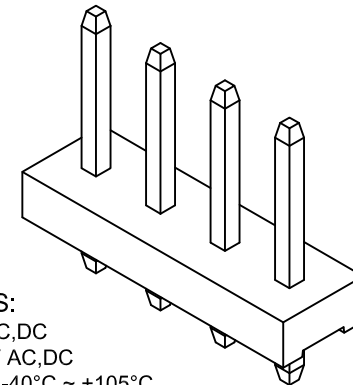
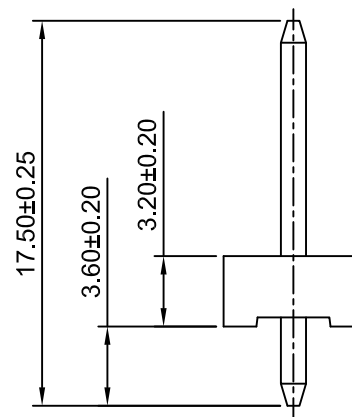


P.C.B LAYOUT

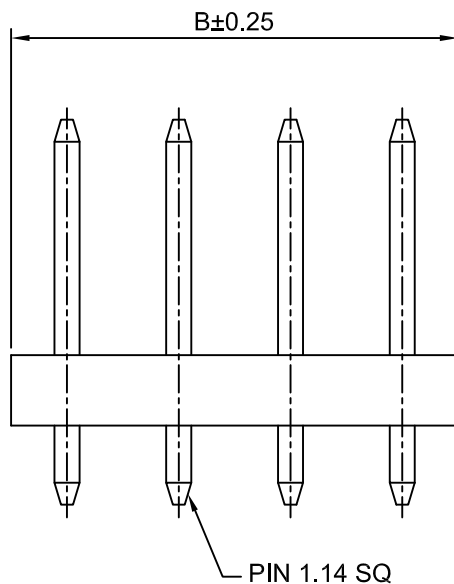

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.08	10.16	12P	55.88	60.96
3P	10.16	15.24	13P	60.96	66.04
4P	15.24	20.32	14P	66.04	71.12
5P	20.32	25.40	15P	71.12	76.20
6P	25.40	30.48	16P	76.20	81.28
7P	30.48	35.56	17P	81.28	86.36
8P	35.56	40.64	18P	86.36	91.44
9P	40.64	45.72	19P	91.44	96.52
10P	45.72	50.80	20P	96.52	101.60
11P	50.80	55.88			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw By:		Approved :
Tony Su		Jack Yln

Title :

5.08mm Pitch

180° Wafer

General Tolerance

x.x±0.25
x.xx±0.20
x.xxx±0.15

PROJECT



DRAW NO :

A5081WVA-XP

REV
A0

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE