
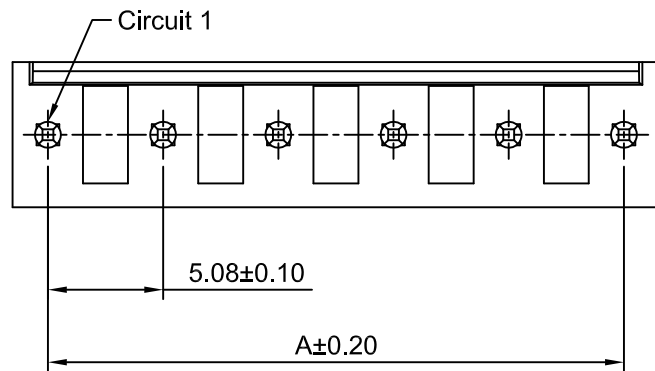

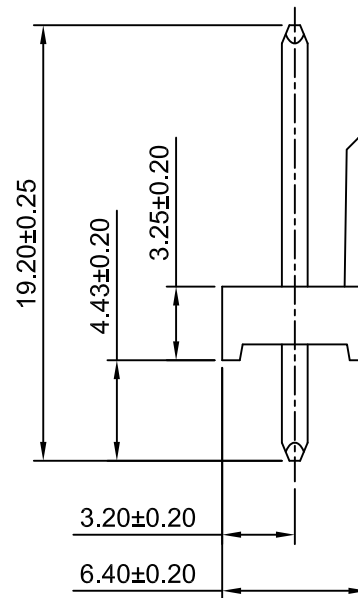


P.C.B LAYOUT

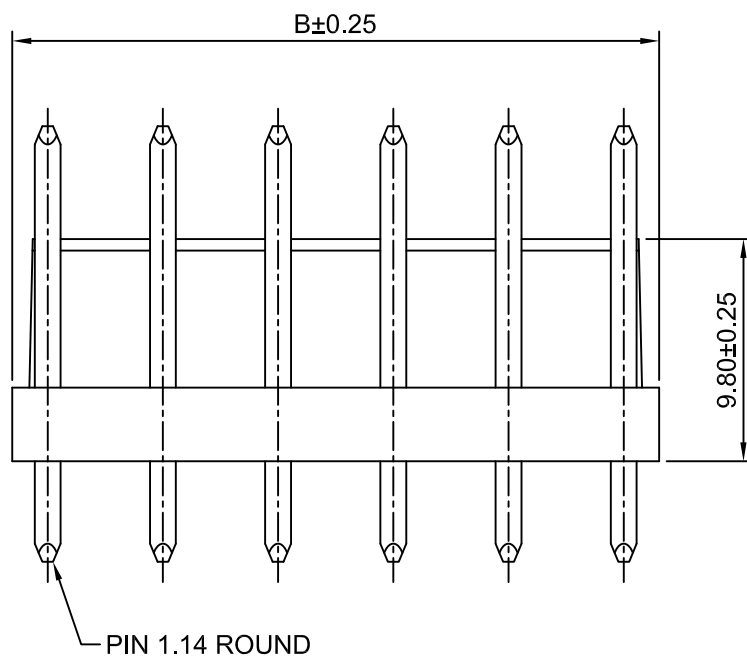

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.08	8.20	10P	45.72	48.84
3P	10.16	13.28	11P	50.80	53.92
4P	15.24	18.36	12P	55.88	59.00
5P	20.32	23.44	13P	60.96	64.08
6P	25.40	28.52	14P	66.04	69.16
7P	30.48	33.60	15P	71.12	74.24
8P	35.56	38.68	16P	76.20	79.32
9P	40.64	43.76	17P	81.28	84.40

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	Title : 5.08mm Pitch 180° Wafer		
mm	3:1	1 of 1			
Draw By:		Approved :			
Diankui Wan		Jack Yin			
General Tolerance					
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT			
					
			DRAW NO : A5081WVB-XP		REV A0