
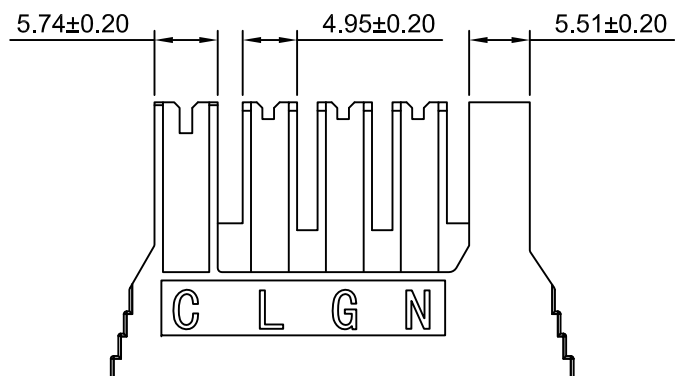


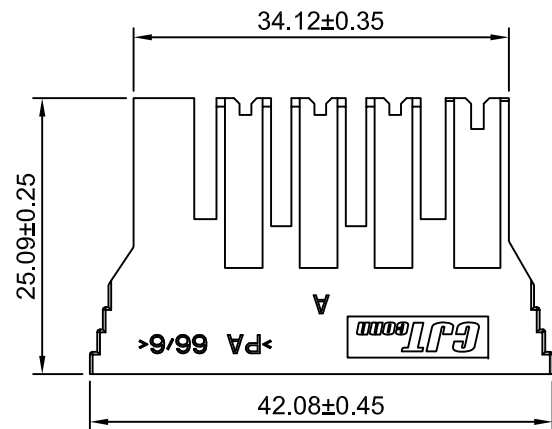


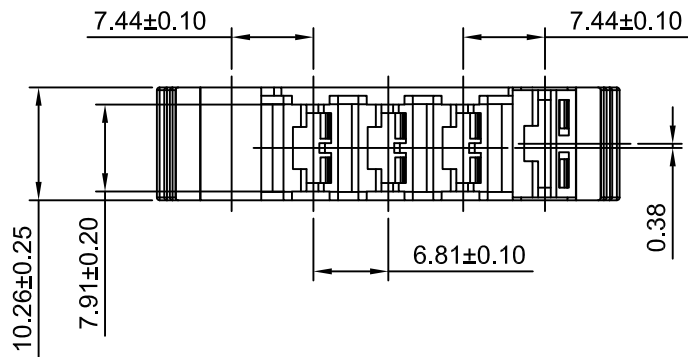

#### Ordering Information:

A7501HA-4P - \*\*\*  
1 2

1.Part NO.


2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0,(Beige)

IEC 60335-1,5th Edition

Glow Wire Capable.



#### SPECIFICATIONS:

Temperature Range: -40°C ~ +125°C

Circuit "C" Accepts:

.250 Positive Lock Receptacles A7501-T-250.

Circuit L、G、N, Accepts:

.187 Positive Lock Receptacles A7501-T-187.

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

|                    |  |             |  |                                                                                       |  |                                           |  |           |  |
|--------------------|--|-------------|--|---------------------------------------------------------------------------------------|--|-------------------------------------------|--|-----------|--|
| Unit               |  | Scale       |  | Sheet                                                                                 |  | TITLE<br><br>7.44-6.81mm PITCH<br>HOUSING |  |           |  |
| mm                 |  | 1.5:1       |  | 1 of 1                                                                                |  |                                           |  |           |  |
| DRWN               |  | CHK'D       |  | APPR                                                                                  |  |                                           |  |           |  |
| Haisen Li          |  | Diankui Wan |  | Jack Yin                                                                              |  |                                           |  |           |  |
| General Tolerances |  |             |  | THIRD ANGLE<br>PROJECTION                                                             |  | DRAWING NO.<br><br>A7501HA-4P             |  | REV<br>A1 |  |
| x.xx±0.25          |  |             |  |                                                                                       |  |                                           |  |           |  |
| x.xxx±0.20         |  |             |  |                                                                                       |  |                                           |  |           |  |
| x.xxxx±0.15        |  |             |  |                                                                                       |  |                                           |  |           |  |
| ANGLES ±1°         |  |             |  |  |  |                                           |  |           |  |