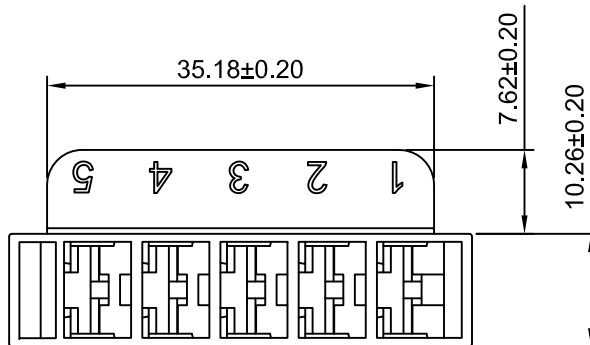
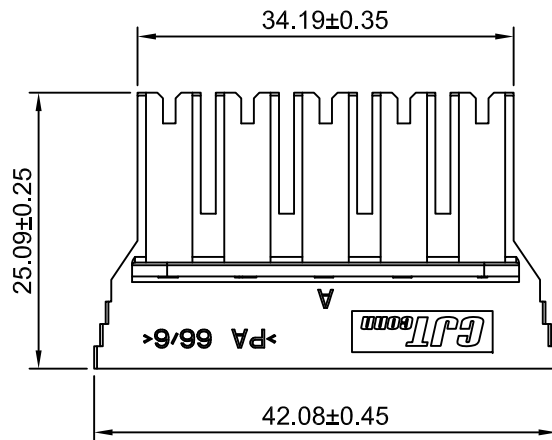
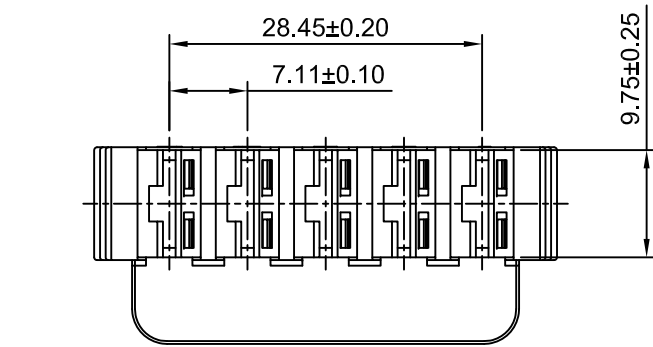


Ordering Information:

A7501HB-5P - ***
1 2

1.Part NO.



2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0,(Beige)

IEC 60335-1,5th Edition

Glow Wire Capable.

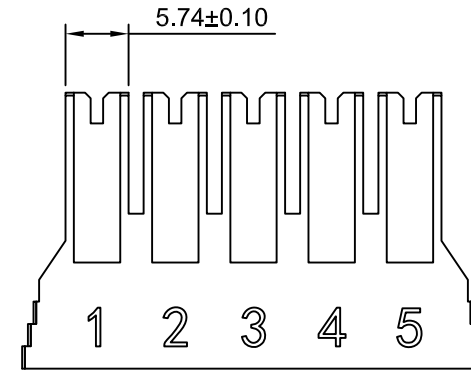

SPECIFICATIONS:

Temperature Range: -40°C ~ +125°C

Accepts:

.250 Positive Lock Receptacles A7501-T-250.

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	7.11mm PITCH HOUSING
DRWN	CHKD	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°			DRAWING NO.
			A7501HB-5P
			REV A1