


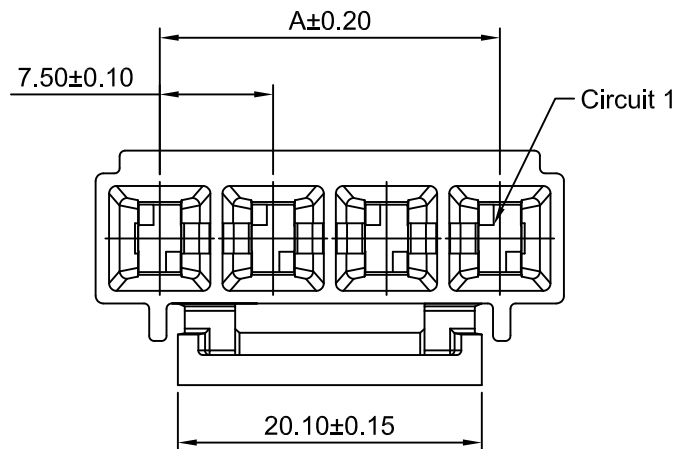


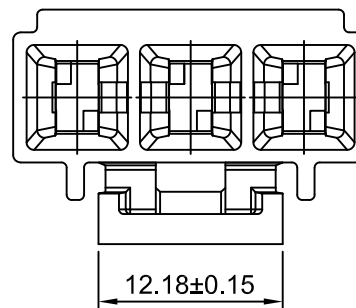

4P~6P,8P

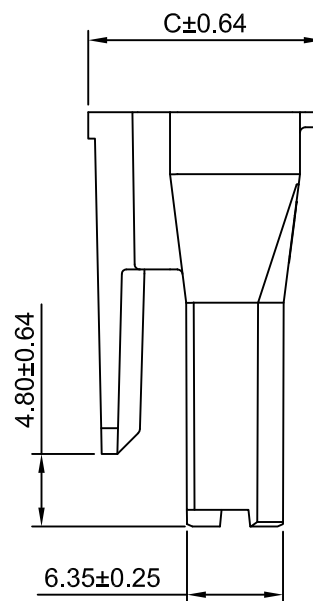

2P~3P

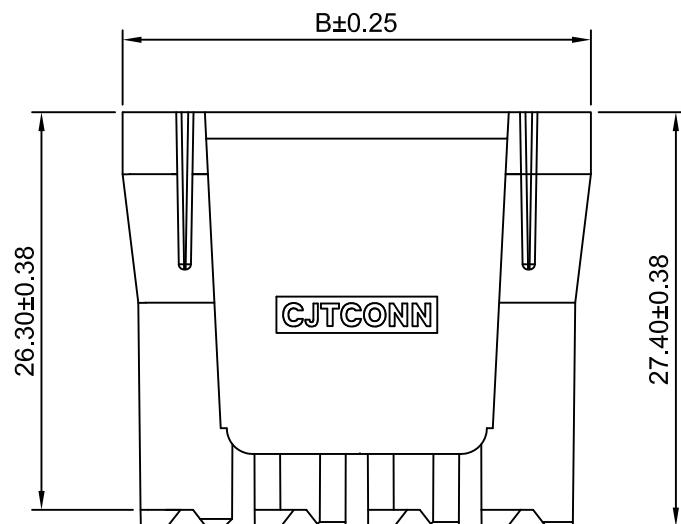

Ordering Information:

A7501HFA-XP - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

V2: Nylon 66,UL94V-2

GWT: Nylon 66,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 34A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A7501HFA-2P	7.50	15.98	15.24
A7501HFA-3P	15.00	23.48	15.51
A7501HFA-4P	22.50	30.98	15.51
A7501HFA-5P	30.00	38.48	15.51
A7501HFA-6P	37.50	45.98	15.51
A7501HFA-8P	52.50	60.98	15.24

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 7.50mm PITCH PLUG HOUSING		
mm	2:1	1 of 1			
DRWN	CHK'D	APPR			
Dengchun Yi	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A7501HFA-XP		REV A2
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
					