

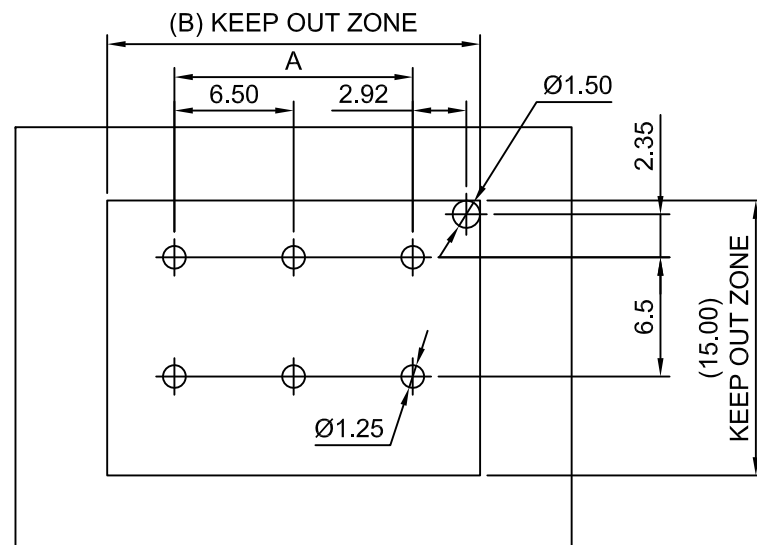
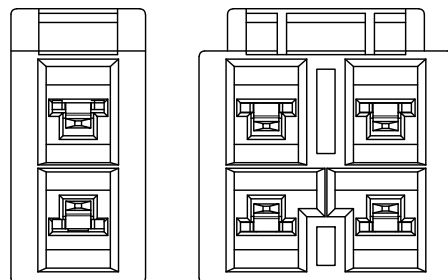
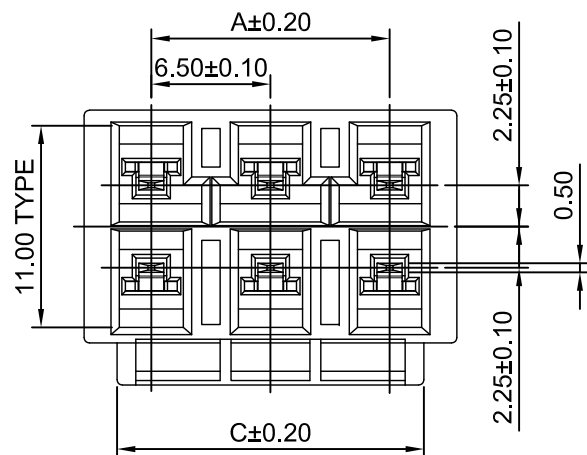


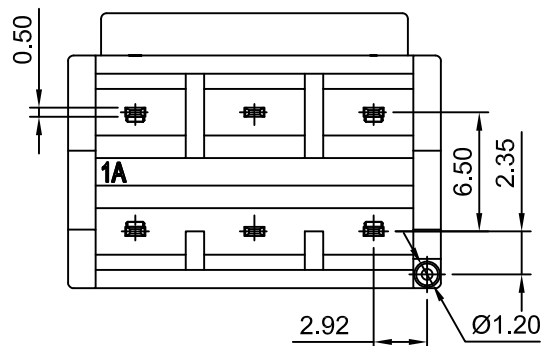

P.C.B LAYOUT
TOLERANCE:±0.05

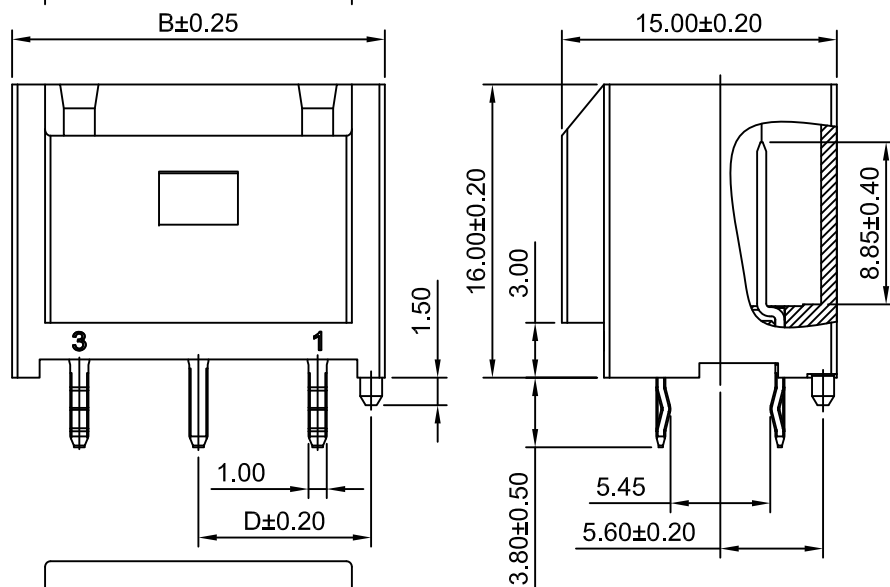

Ordering Information:

A7501WVD-F-2xXP - *** - ***
1 2 3

1.Part NO.

2.Color:

(Blank): Natural(White)

BK: Black RD: Red

YL: Yellow GN: Green

BR: Brown GY: Gray

PL: Purple MT: Mint

BL: Blue

OR: Orange

PK: Pink

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1u",Mating Area)

G15: Gold over Nickel (Au:15u",Mating Area)

G30: Gold over Nickel (Au:30u",Mating Area)

SPECIFICATIONS:

Current Rating: 10A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

PIN Material: Copper Alloy

Material: Nylon 66 + 30%Glass Fiber,UL94V-0,

IEC 60335-1,5th Edition Glow Wire Capable.

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A7501WVD-F-2x1P-2	--	7.34	7.34	2.92
A7501WVD-F-2x2P-2	6.50	13.84	10.74	6.17
A7501WVD-F-2x3P-2	13.00	20.34	16.74	9.42

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet


mm 2.5:1 1 of 1

DRWN CHK'D APPR

Wenmin Luo DianKui Wan Jack Yin

General Tolerances THIRD ANGLE PROJECTION

x.xx±0.25
x.xx±0.20
x.xx±0.15
ANGLES ±1°



TITLE

6.50mm PITCH
VERTICAL DIP HEADER

DRAWING NO.

A7501WVD-F-2xXP-2

REV
A0

A0	NEW RELEASE	2021.07.01
REV	DESCRIPTION	DATE