

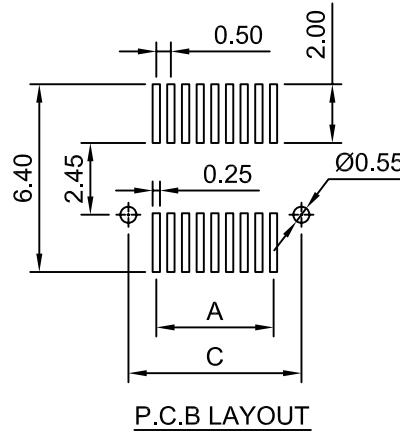

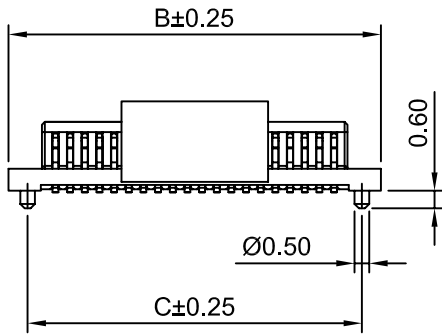


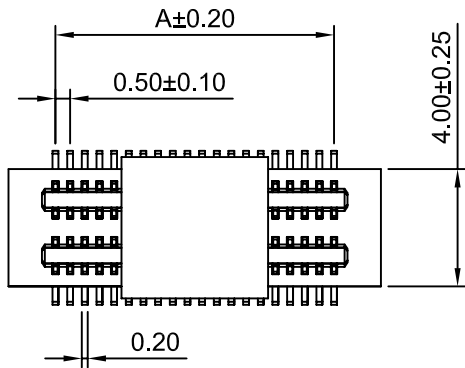

Ordering Information:
B0501WVMA-S-2xXP - ****
1 2

1.Part No.
2.Size(H):
H240: 2.40mm
H290: 2.90mm



SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 40mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material:Phosphor Bronze/Gold over Nickel
Material: Nylon46,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x5P	2.00	5.20	3.90	2x19P	9.00	12.20	10.90
2x6P	2.50	5.70	4.40	2x20P	9.50	12.70	11.40
2x7P	3.00	6.20	4.90	2x21P	10.00	13.20	11.90
2x8P	3.50	6.70	5.40	2x22P	10.50	13.70	12.40
2x9P	4.00	7.20	5.90	2x23P	11.00	14.20	12.90
2x10P	4.50	7.70	6.40	2x24P	11.50	14.70	13.40
2x11P	5.00	8.20	6.90	2x25P	12.00	15.20	13.90
2x12P	5.50	8.70	7.40	2x30P	14.50	17.70	16.40
2x13P	6.00	9.20	7.90	2x35P	17.00	20.20	18.90
2x14P	6.50	9.70	8.40	2x40P	19.50	22.70	21.40
2x15P	7.00	10.20	8.90	2x45P	22.00	25.20	23.90
2x16P	7.50	10.70	9.40	2x50P	24.50	27.70	26.40
2x17P	8.00	11.20	9.90	2x60P	29.50	32.70	31.40
2x18P	8.50	11.70	10.40				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :		0.5mm B To B Plug	
DRAW NO :		B0501WVMA-S-2xXP	REV A0

A0	NEW RELEASE	2017.04.10
REV	DESCRIPTION	DATE

General Tolerance	
x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	