
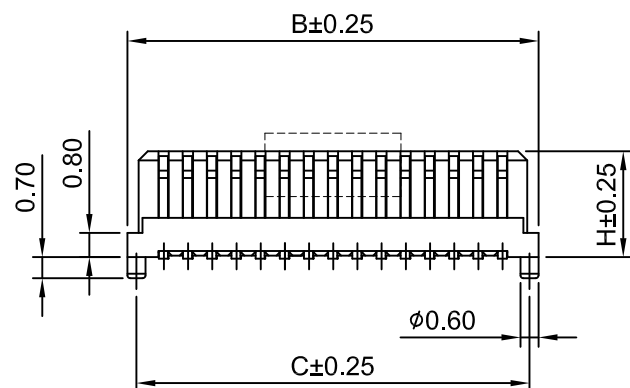
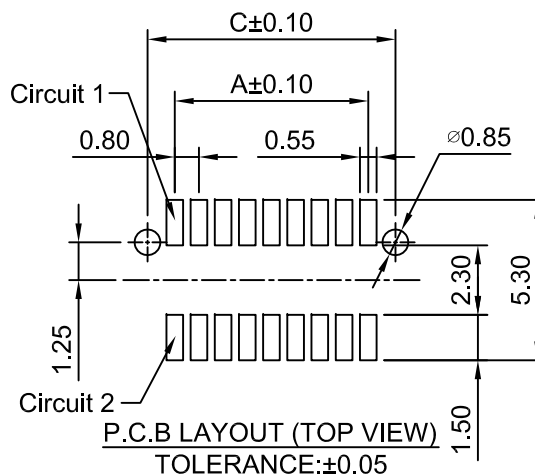
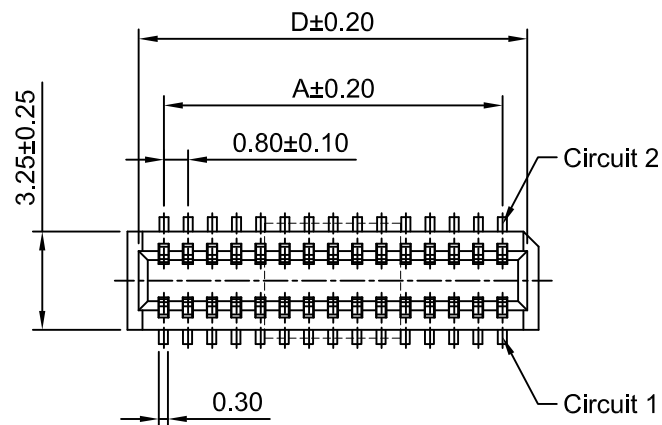


ASSEMBLY LAYOUT
MATED WITH B0802WVM-S-2xXP


Mating Dimension: (mm)

H	Mates With	Mating Height
3.55	B0802WVM-S-2xXP-H515	6.00
	B0802WVM-S-2xXP-H565	6.50
4.05	B0802WVM-S-2xXP-H515	6.50
	B0802WVM-S-2xXP-H565	7.00

A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2017.04.10
REV	DESCRIPTION	DATE

Ordering Information:
B0801WVF-S-2xXP - *** - ***
1 2 3

- Part NO.
- Size(H):
H355: 3.55mm
H405: 4.05mm
- Packing:
(Blank): Tape & Reel with cap



SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 40mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Gold over Nickel
Material: LCP, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2x5P	3.20	5.60	5.00	4.85	2x17P	12.80	15.20	14.60	14.45
2x6P	4.00	6.40	5.80	5.75	2x18P	13.60	16.00	15.40	15.25
2x7P	4.80	7.20	6.60	6.65	2x19P	14.40	16.80	16.20	16.05
2x8P	5.60	8.00	7.40	7.55	2x20P	15.20	17.60	17.00	16.85
2x9P	6.40	8.80	8.20	8.45	2x25P	19.20	21.60	21.00	20.85
2x10P	7.20	9.60	9.00	9.35	2x30P	23.20	25.60	25.00	24.85
2x11P	8.00	10.40	9.80	10.25	2x34P	26.40	28.80	28.20	28.05
2x12P	8.80	11.20	10.60	11.15	2x35P	27.20	29.60	29.00	28.85
2x13P	9.60	12.00	11.40	12.05	2x40P	31.20	33.60	33.00	32.85
2x14P	10.40	12.80	12.20	12.95	2x45P	35.20	37.60	37.00	36.85
2x15P	11.20	13.60	13.00	13.85	2x50P	39.20	41.60	41.00	40.85
2x16P	12.00	14.40	13.80	14.75					

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	0.80mm PITCH	
DRWN	CHK'D	APPR	BOARD TO BOARD CONNECTOR	
Dengchun Yi	Diankui Wan	Jack Yin	SOCKET	
General Tolerances			DRAWING NO.	REV
x, x±0.25 x, x±0.20 x, x±0.15 ANGLES ±1°			B0802WVF-S-2xXP	A1