


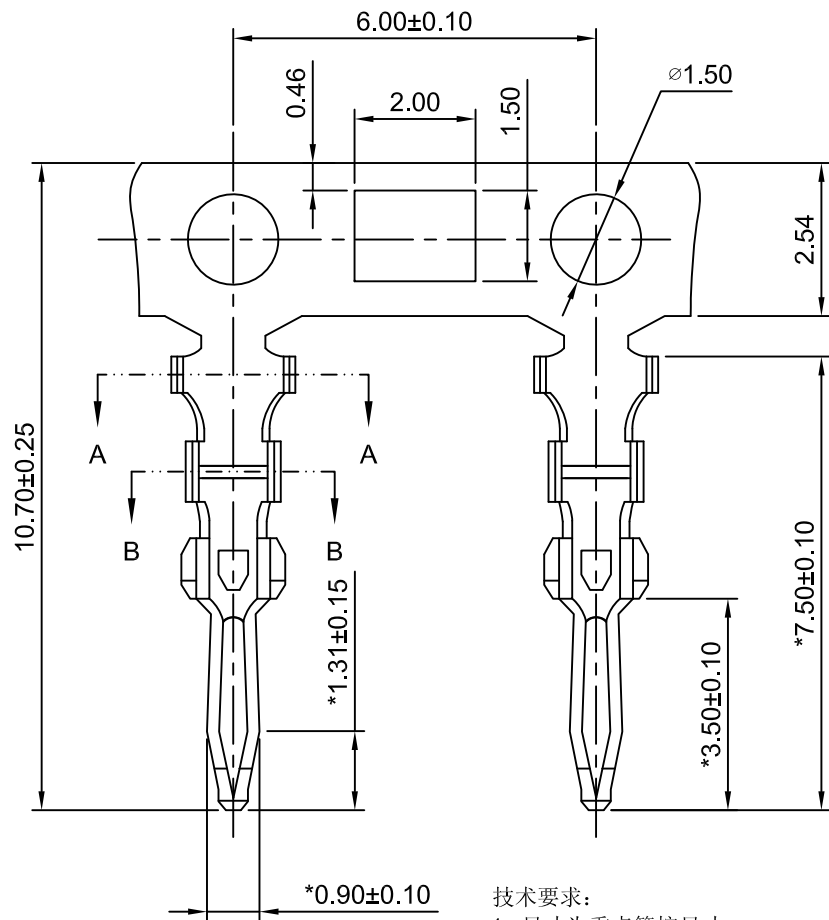



技术要求:

- 1.*尺寸为重点管控尺寸
- 2.插针表面光亮清洁,周边边缘光滑,结构完整,无变形、无飞边、无毛刺、无氧化发黑等现象
- 3.材料符合RoHS要求
- 4.电镀后能满足盐雾实验24小时要求
- 5.产品未标注尺寸以样件为准.
- 6.镀层要求: 镍底镀亮锡
Ni :1~2μm Min.
Sn:2~3μm Min.


Ordering information & Specifications

Unit:mm


Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B2011-TB-AW	AWG#24-#30	1.40mm(max)	Brass	Tin over Nickel	15,000 PCS

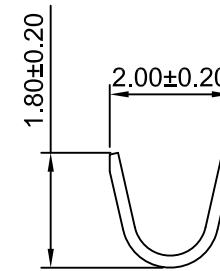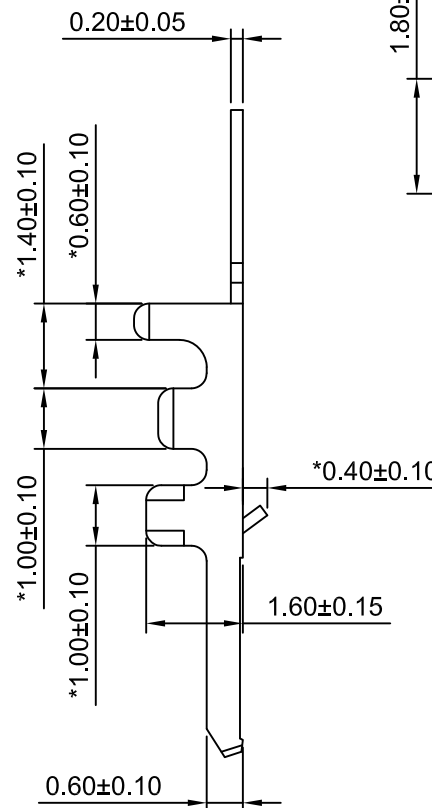

SEC:A-A

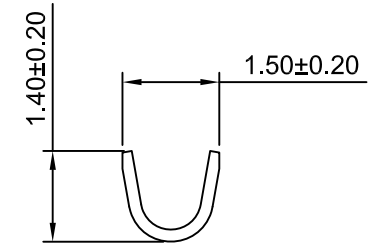

SEC:B-B

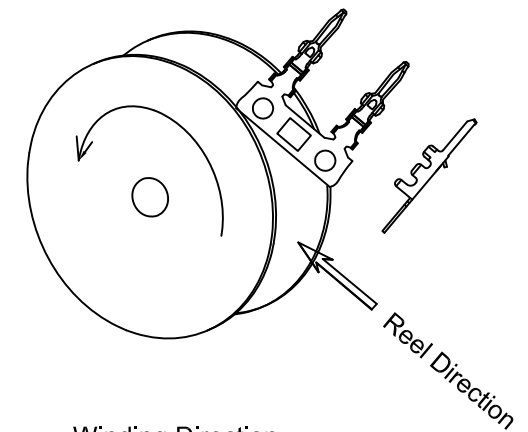

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.00mm PITCH 180° CRIMP TERMINAL	
mm	8:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. B2011-T-AW	REV A4
x, x±0.25 x, x±0.20 x, x±0.15 ANGLES ±1°				
				

REV	DESCRIPTION	DATE
A4	MODIFY DRAWING	2021.05.19
A3	ADD DIMENSION	2021.05.10
A2	ADD TOLERANCE	2021.03.30
A1	CHANGE THE TOLERANCE	2021.02.03
A0	NEW RELEASE	2021.01.16