

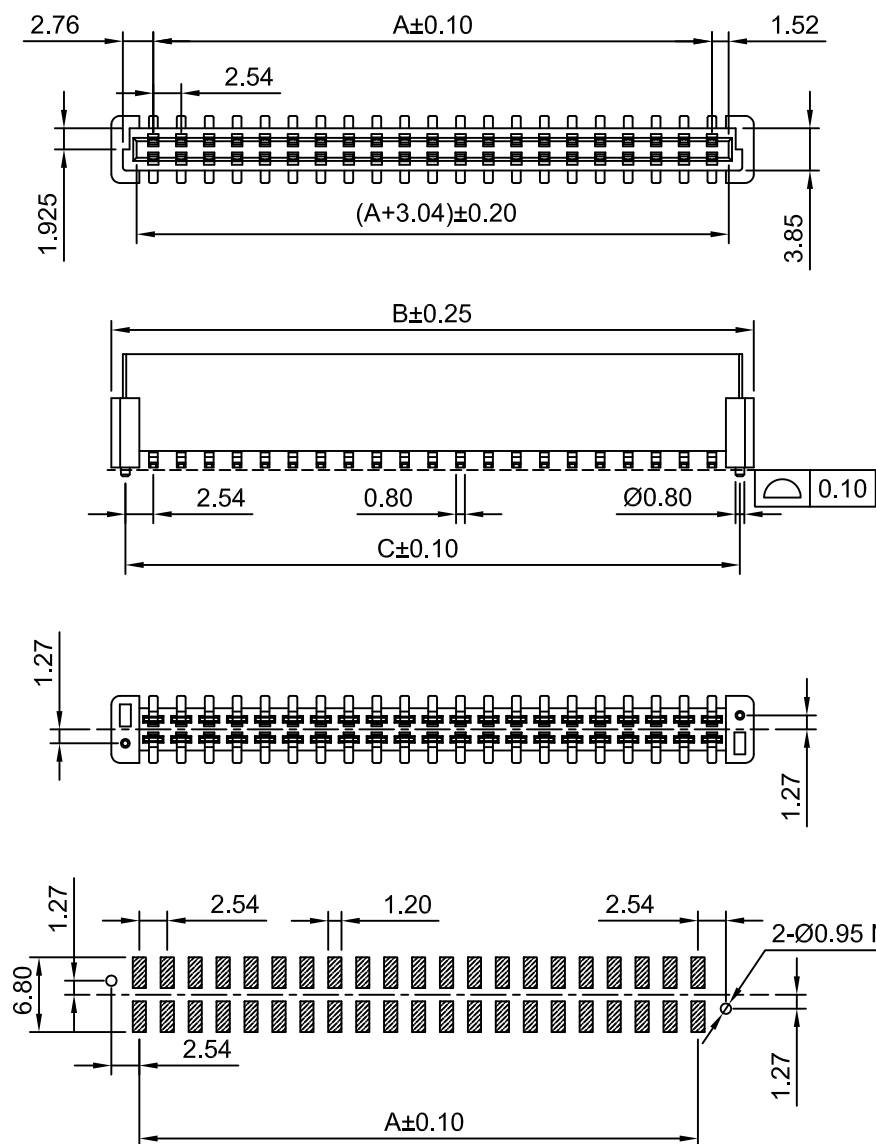


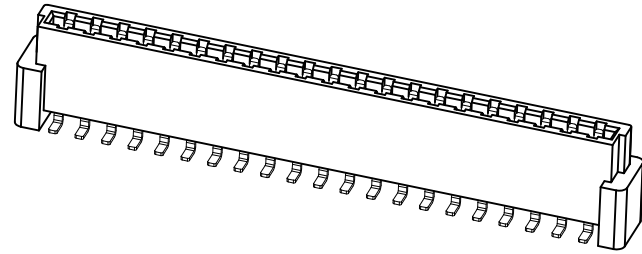

P.C.B LAYOUT
TOLERANCE:±0.05

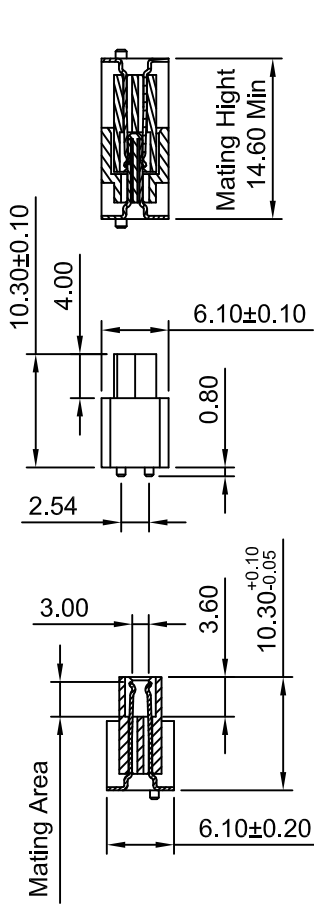

SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Material: LCP,UL94V-0(Black)
Pin Material: Phosphor Bronze/Gold over Nickel
Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
B2541WVFB-S-F-2x10P	22.86	30.48	27.91
B2541WVFB-S-F-2x12P	27.94	35.56	32.99
B2541WVFB-S-F-2x15P	35.56	43.18	40.61
B2541WVFB-S-F-2x16P	38.10	45.72	43.15
B2541WVFB-S-F-2x18P	43.18	50.80	48.23
B2541WVFB-S-F-2x20P	48.26	55.88	53.31
B2541WVFB-S-F-2x21P	50.80	58.42	55.85
B2541WVFB-S-F-2x22P	53.34	60.96	58.39
B2541WVFB-S-F-2x24P	58.42	66.04	63.47
B2541WVFB-S-F-2x25P	60.96	68.58	66.01
B2541WVFB-S-F-2x26P	63.50	71.12	68.55
B2541WVFB-S-F-2x28P	68.58	76.20	73.63
B2541WVFB-S-F-2x30P	73.66	81.28	78.71

CJTconnCHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 1.5:1	Sheet 1 of 1	TITLE 2.54mm PITCH VERTICAL B TO B PLUG -SMD TYPE	
DRAWN Halsen Li	CHK'D Dlankul Wan	APPR Jack Yin		
General Tolerances x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
THIRD ANGLE PROJECTION			DRAWING NO. B2541WVFB-S-F-XP	
A0	NEW RELEASE	2023.03.24	REV A0	
REV	DESCRIPTION	DATE		