

Ordering Information:

C2003HFB-XP - *** - ***

1 2 3

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BL: Blue BK: Black

GN: Green GY: Gray

RD: Red YL: Yellow

LG: Light Green

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min






Withstanding Voltage: 800V AC/minute

Ordering Information & Dimensions


Part NO.	Dimensions(mm)		
	A	B	C
C2003HFB-2P	2.00	5.71	4.35
C2003HFB-3P	4.00	7.71	6.35
C2003HFB-4P	6.00	9.71	8.35
C2003HFB-5P	8.00	11.71	10.35
C2003HFB-6P	10.00	13.71	12.35
C2003HFB-7P	12.00	15.71	14.35
C2003HFB-8P	14.00	17.71	16.35
C2003HFB-9P	16.00	19.71	18.35
C2003HFB-10P	18.00	21.71	20.35
C2003HFB-11P	20.00	23.71	22.35
C2003HFB-12P	22.00	25.71	24.35
C2003HFB-13P	24.00	27.71	26.35
C2003HFB-14P	26.00	29.71	28.35
C2003HFB-15P	28.00	31.71	30.35
C2003HFB-16P	30.00	33.71	32.35

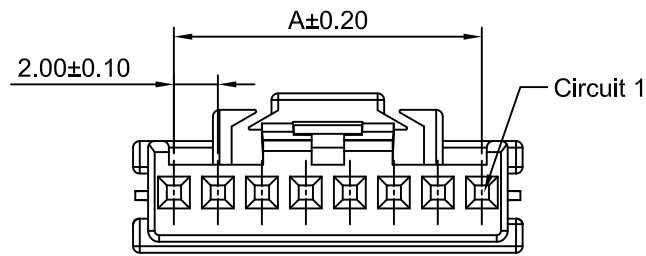


5P~15P

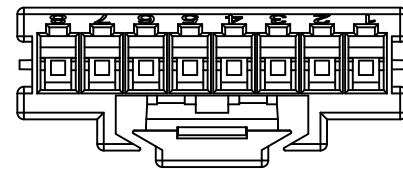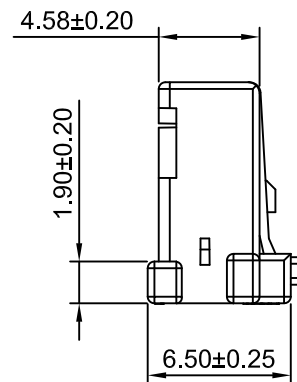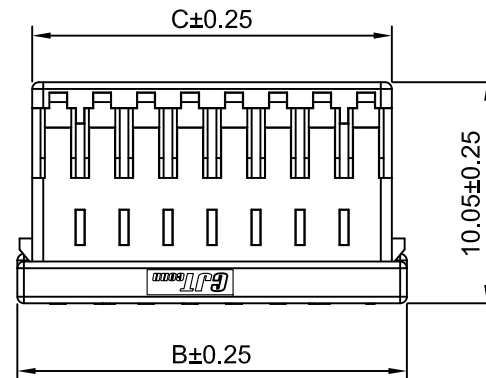

2P



3P



4P

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.00mm PITCH HOUSING		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C2003HFB-XP		