

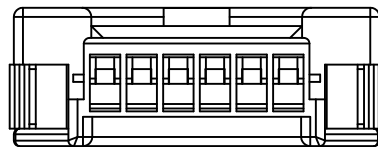
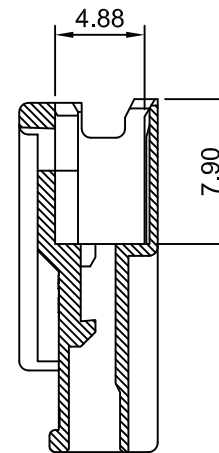
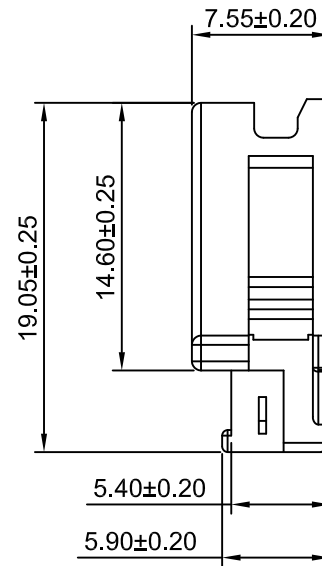


PANEL HOLE LAYOUT
TOLERANCE:±0.05

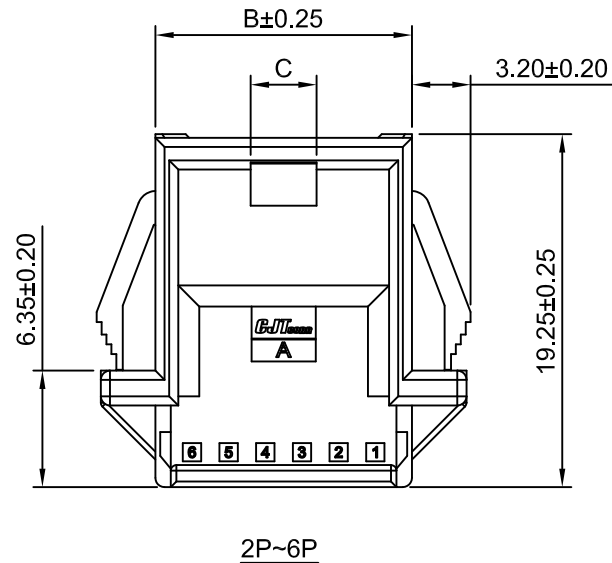

7P~15P
1:2

Ordering Information:
C2003HMB-XP - *** - ***
1 2 3

- Part NO.
- Material:
(Blank): Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- Color:
(Blank): see section 2 Material
BL: Blue BK: Black
GN: Green GY: Gray
RD: Red YL: Yellow
LG: Light Green

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 15mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C2003HMB-2P	2.00	6.00	1.50
C2003HMB-3P	4.00	8.00	2.06
C2003HMB-4P	6.00	10.00	3.06
C2003HMB-5P	8.00	12.00	3.06
C2003HMB-6P	10.00	14.00	3.60
C2003HMB-7P	12.00	16.00	3.60
C2003HMB-8P	14.00	18.00	3.60
C2003HMB-9P	16.00	20.00	3.60
C2003HMB-10P	18.00	22.00	3.60
C2003HMB-11P	20.00	24.00	3.60
C2003HMB-12P	22.00	26.00	3.60
C2003HMB-13P	24.00	28.00	3.60
C2003HMB-14P	26.00	30.00	3.60
C2003HMB-15P	28.00	32.00	3.60

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 2.5:1	Sheet 1 of 1	TITLE 2.00mm PITCH HOUSING
DRWN Chengbiao Ye	CHKD Diankui Wan	APPR Jack Yin	
General Tolerances x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
THIRD ANGLE PROJECTION 			DRAWING NO. C2003HMB-XP
REV A2			REV A2

A2	CHANGE THE DRAWING	2023.01.10
A1	CHANGE THE DRAWING	2022.01.20
A0	NEW RELEASE	2018.04.03
REV	DESCRIPTION	DATE