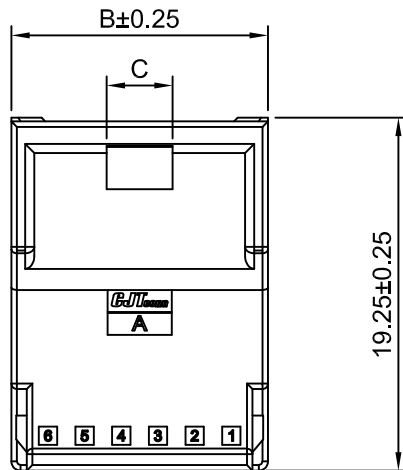
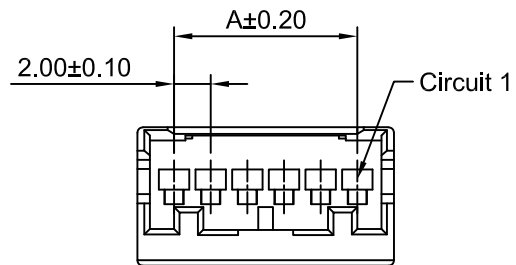


Ordering Information:

C2003HMC-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(blank): see section 2 Material

BL: Blue BK: Black

GN: Green GY: Gray

RD: Red YL: Yellow

LG: Light Green

SPECIFICATIONS:

Current Rating: 3A AC,DC (AWG #22)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 15mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon66, UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C2003HMC-2P	2.00	6.00	1.50
C2003HMC-3P	4.00	8.00	2.06
C2003HMC-4P	6.00	10.00	3.06
C2003HMC-5P	8.00	12.00	3.06
C2003HMC-6P	10.00	14.00	3.60
C2003HMC-7P	12.00	16.00	3.60
C2003HMC-8P	14.00	18.00	3.60
C2003HMC-9P	16.00	20.00	3.60
C2003HMC-10P	18.00	22.00	3.60
C2003HMC-11P	20.00	24.00	3.60
C2003HMC-12P	22.00	26.00	3.60
C2003HMC-13P	24.00	28.00	3.60
C2003HMC-14P	26.00	30.00	3.60
C2003HMC-15P	28.00	32.00	3.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH HOUSING	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A2
x.xxx±0.25				
x.xxx±0.20				
x.xxx±0.15				
ANGLES ±1°				
				