





1P




2P

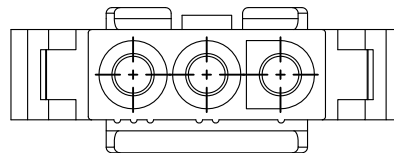

3P

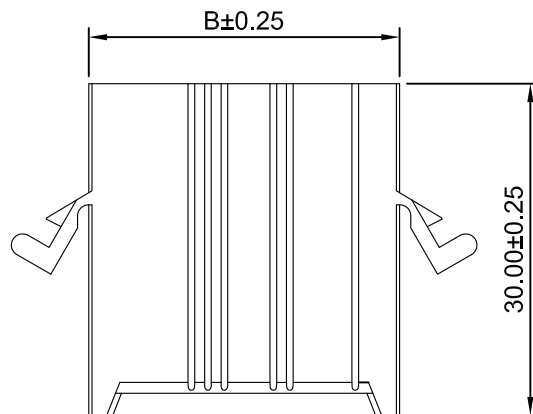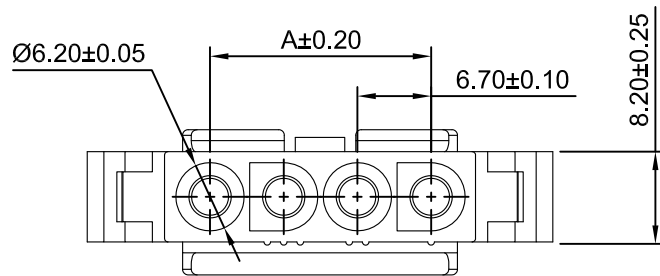

4P

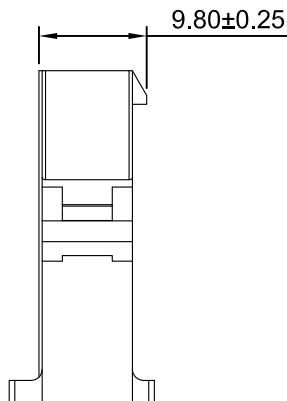

Ordering Information:

C2363HM-XP - **
1 2

1.Part No.

2.Material:


(Blank):UL94V-2/Natural

V0:UL94V-0/White

(B+6.10)±0.20

10.00±0.20

Panel Hole Layout

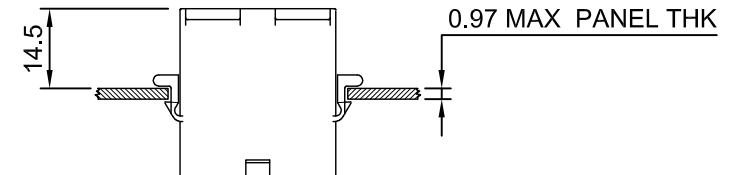

SPECIFICATIONS:

Current Rating: 12A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Part No	Dimensions (mm)		Part No	Dimensions (mm)	
	A	B		A	B
C2363HM-1P	6.70	8.17	C2363HM-3P	13.40	21.57
C2363HM-2P		14.87	C2363HM-4P	20.10	28.27

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 6.70mm PITCH HOUSING	
mm		1.5:1		1 of 1			
DRWN		CHK'D		APPR			
Xu Lei		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
2		DRAWING NO.				REV A0	
		C2363HM-XP					

A0	NEW RELEASE	2020.11.12
REV	DESCRIPTION	DATE