





1P




2P



3P

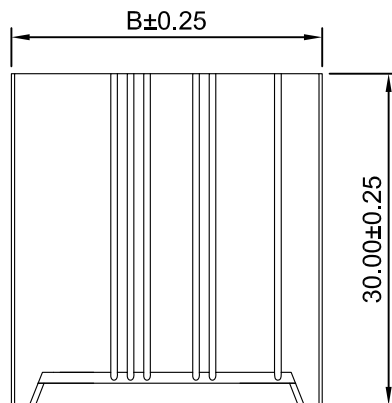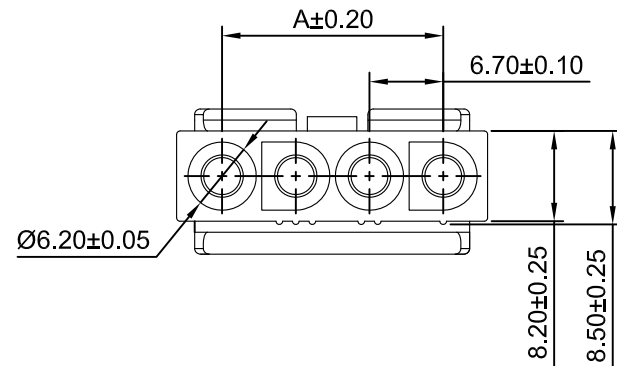

4P

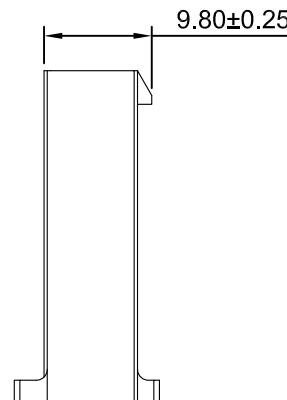

Ordering Information:

C2363HMA-XP - **
1 2

1.Part No.

2.Material:

(Blank):UL94V-2/Natural

V0:UL94V-0/White

SPECIFICATIONS:

Current Rating: 12A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Part No	Dimensions (mm)		Part No	Dimensions (mm)	
	A	B		A	B
C2363HMA-1P	6.70	8.17	C2363HMA-3P	13.40	21.57
C2363HMA-2P		14.87	C2363HMA-4P	20.10	28.27

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1.5:1	1 of 1	6.70mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Xu Lei	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C2363HMA-XP		A0

A0	NEW RELEASE	2019.12.21
REV	DESCRIPTION	DATE