
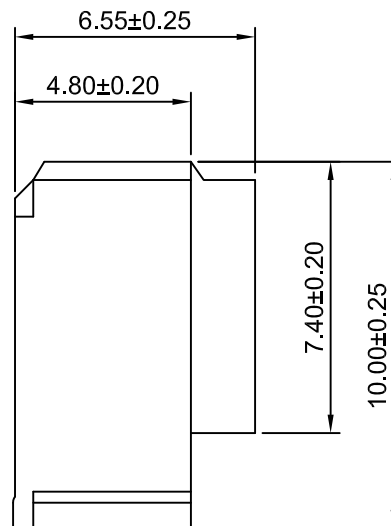

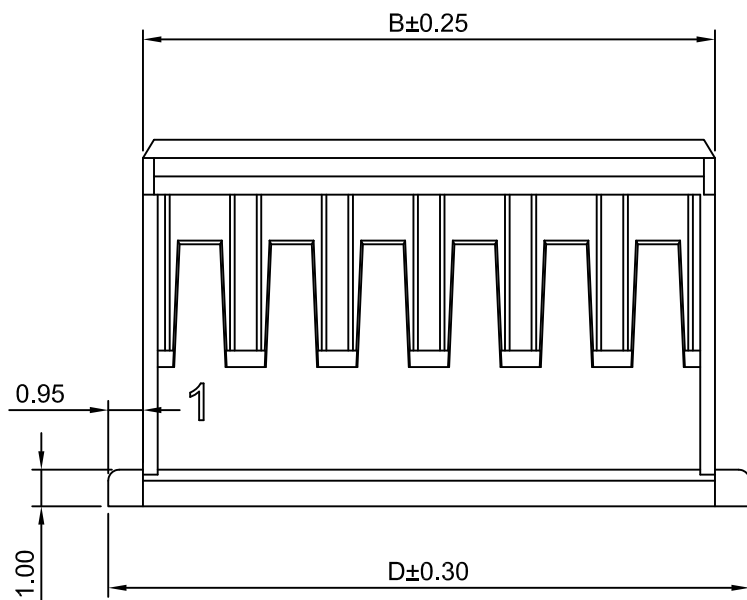


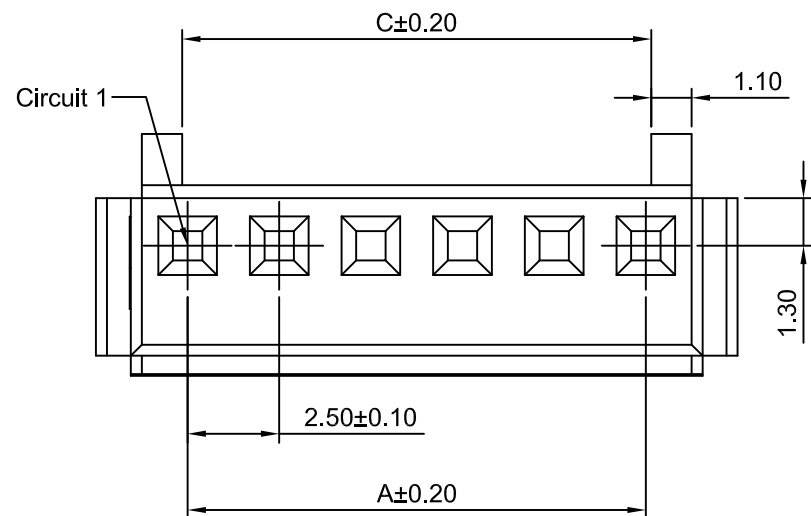

Ordering Information:

C2504HFA-XP - ***

1 2

1.Part No.

2.Material:

(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0 (Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
C2504HFA-2P	2.50	5.60	2.80	7.50
C2504HFA-3P	5.00	8.10	5.30	10.00
C2504HFA-4P	7.50	10.60	7.80	12.50
C2504HFA-5P	10.00	13.10	10.30	15.00
C2504HFA-6P	12.50	15.60	12.80	17.50
C2504HFA-7P	15.00	18.10	15.30	20.00
C2504HFA-8P	17.50	20.60	17.80	22.50
C2504HFA-9P	20.00	23.10	20.30	25.00
C2504HFA-10P	22.50	25.60	22.80	27.50
C2504HFA-11P	25.00	28.10	25.30	30.00
C2504HFA-12P	27.50	30.60	27.80	32.50
C2504HFA-13P	30.00	33.10	30.30	35.00
C2504HFA-14P	32.50	35.60	32.80	37.50
C2504HFA-15P	35.00	38.10	35.30	40.00
C2504HFA-16P	37.50	40.60	37.80	42.50
C2504HFA-17P	40.00	43.10	40.30	45.00
C2504HFA-18P	42.50	45.60	42.80	47.50
C2504HFA-19P	45.00	48.10	45.30	50.00
C2504HFA-20P	47.50	50.60	47.80	52.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	2.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.	
			C2504HFA-XP	
			REV A2	

A2	CHANGE THE INFORMATION	2020.08.29
A1	ADD THE SIZE	2020.04.26
A0	NEW RELEASE	2018.12.10
REV	DESCRIPTION	DATE