
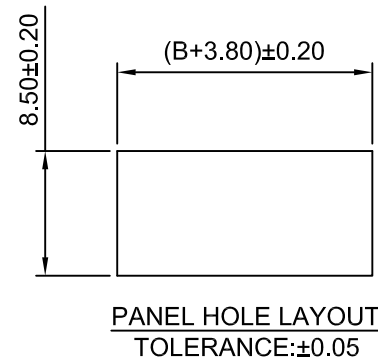


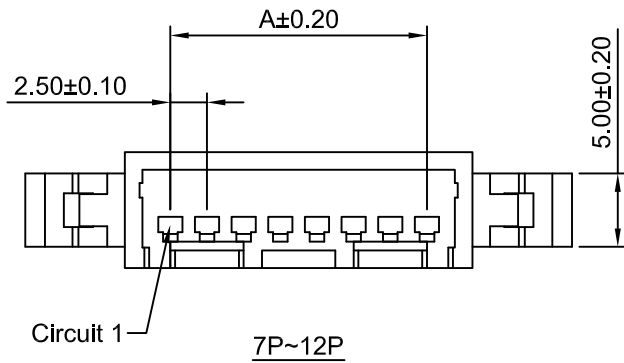

Ordering Information:




C2504HM-XP - ***
1 2

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

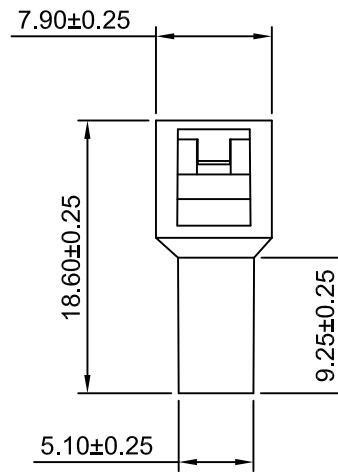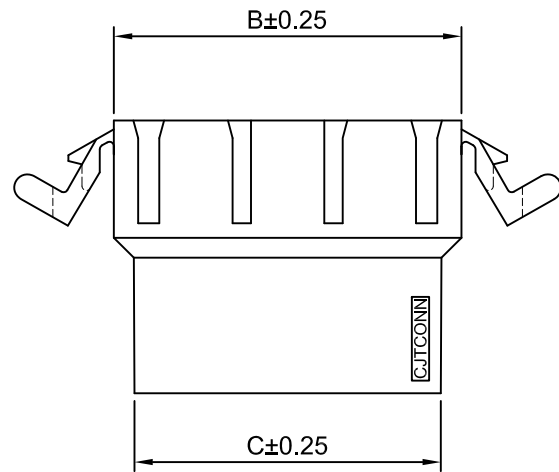

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.



Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C2504HM-2P	2.50	8.70	5.90
C2504HM-3P	5.00	11.20	8.40
C2504HM-4P	7.50	13.70	10.90
C2504HM-5P	10.00	16.20	13.40
C2504HM-6P	12.50	18.70	15.90
C2504HM-7P	15.00	21.20	18.40
C2504HM-8P	17.50	23.70	20.90
C2504HM-9P	20.00	26.20	23.40
C2504HM-10P	22.50	28.70	25.90
C2504HM-11P	25.00	31.20	28.40
C2504HM-12P	27.50	33.70	30.90



CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	2.50mm PITCH HOUSING
DRWN	CHK'D	APPR	
Dengchun Yi	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			
		DRAWING NO.	REV A1
		C2504HM-XP	