


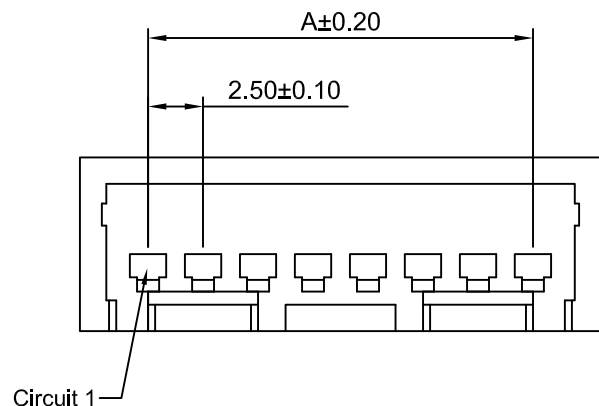





7P~12P

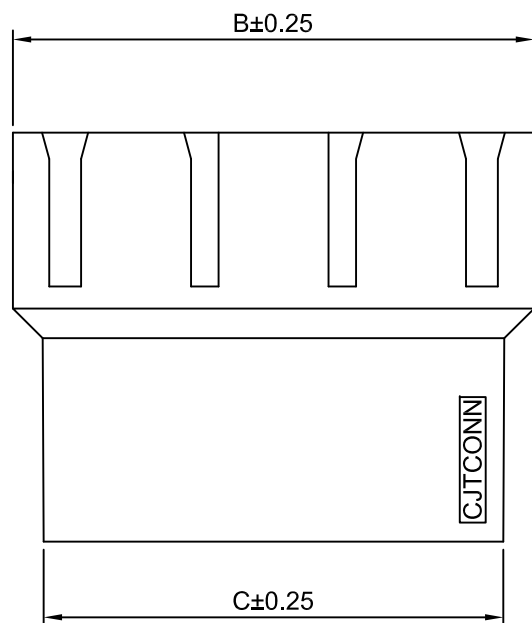

5P~6P



2P~4P

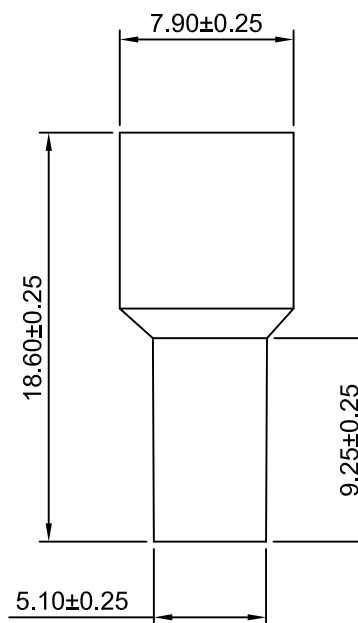

Ordering Information:

C2504HMA-XP - ***
1 2

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C2504HMA-2P	2.50	8.70	5.90
C2504HMA-3P	5.00	11.20	8.40
C2504HMA-4P	7.50	13.70	10.90
C2504HMA-5P	10.00	16.20	13.40
C2504HMA-6P	12.50	18.70	15.90
C2504HMA-7P	15.00	21.20	18.40
C2504HMA-8P	17.50	23.70	20.90
C2504HMA-9P	20.00	26.20	23.40
C2504HMA-10P	22.50	28.70	25.90
C2504HMA-11P	25.00	31.20	28.40
C2504HMA-12P	27.50	33.70	30.90

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.50mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Dengchun YI	Dlankut Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		REV
			C2504HMA-XP		A1