
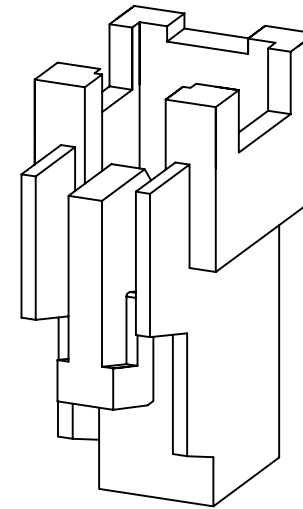
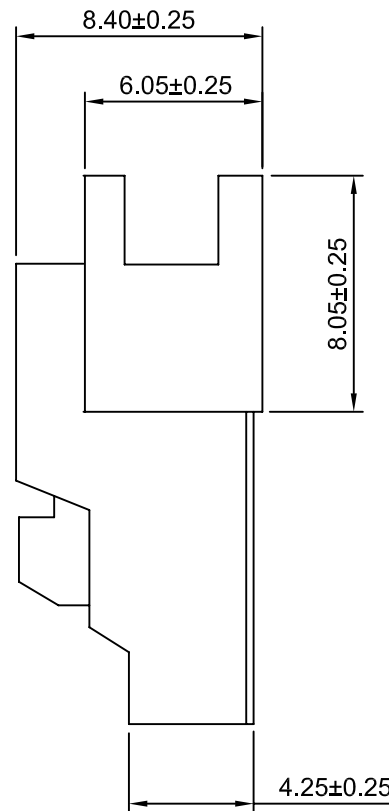
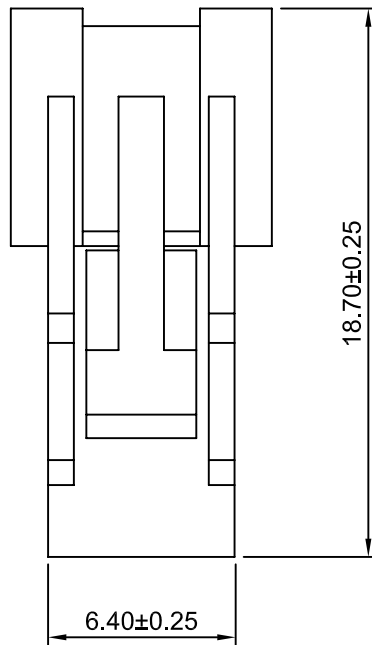


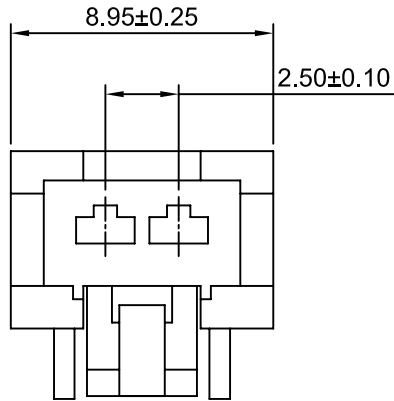

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.




Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
2.50mm PITCH
HOUSING

General Tolerance	
x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

DRAW NO : **C2504HMB-2P** REV
A0

AO	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

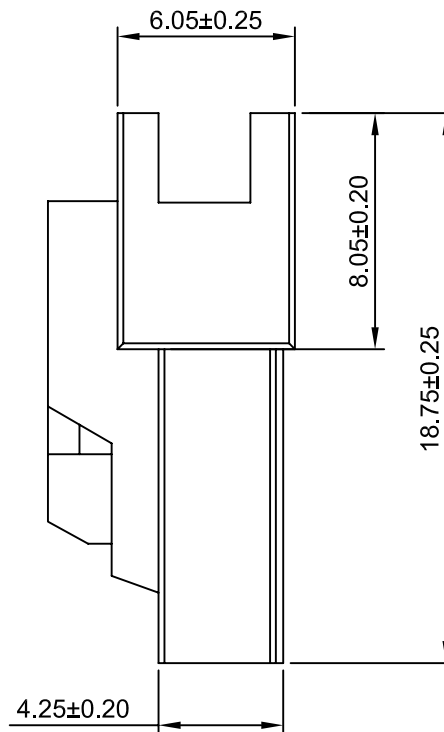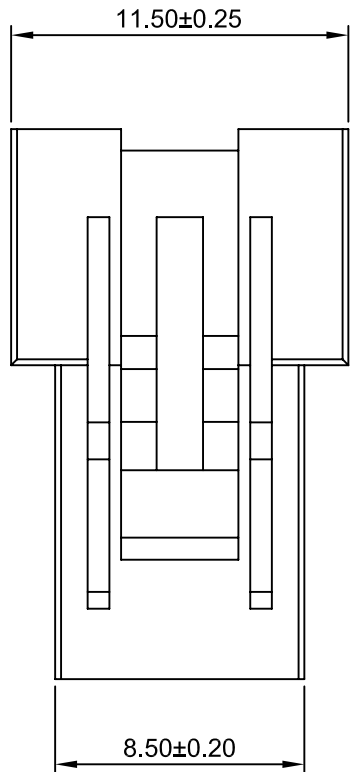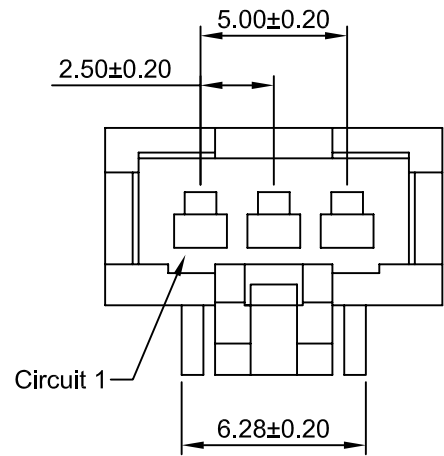

SPECIFICATIONS:
 Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66 UL94V-0(White)

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.50mm PITCH HOUSING	
mm	4:1	1 of 1		
Draw BY:		Approved :		
Tony Su		Jack Yin	DRAW NO : C2504HMB-3P	
General Tolerance				
ANGLE±				
x.x≤0.25				REV A0
x.xx≤0.20				
x.xxx≤0.15				

REV
A0