

Ordering Information:





C3030HFB-2xXP - ***

1. Part NO.



2. Material:

(blank): Nylon 66, UL94V-0

GWT: Nylon 66, UL94V-0,
IEC 60335-1, 5th Edition
Glow Wire Capable.

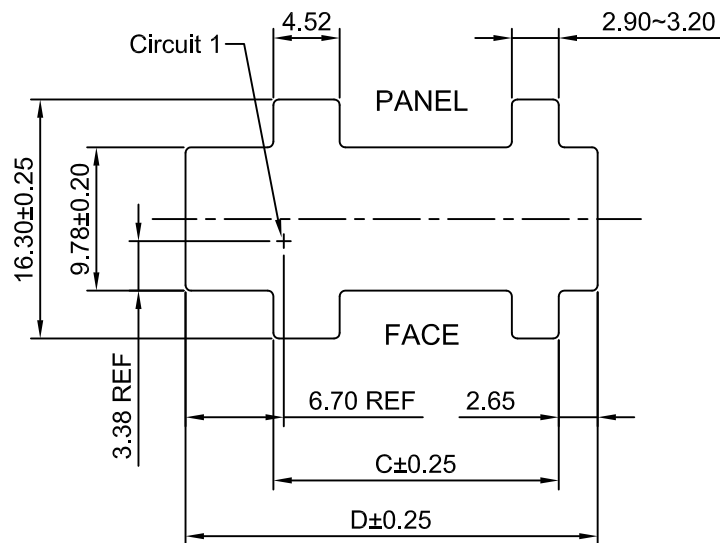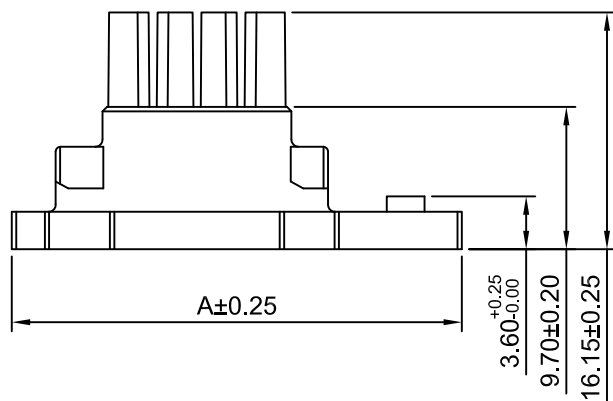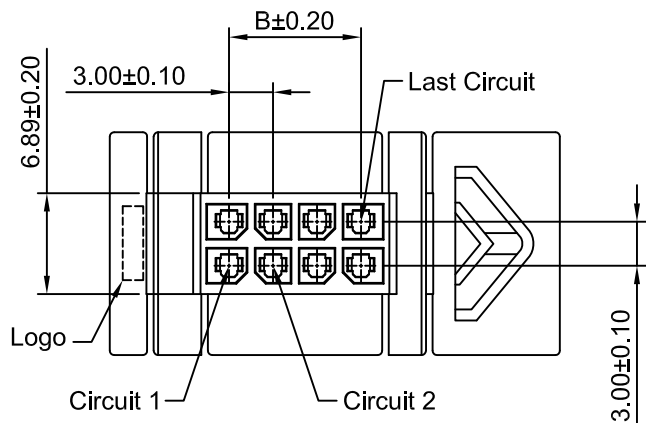

PANEL OPENING
RECOMMENDED PANEL THICKNESS
1.57/1.27

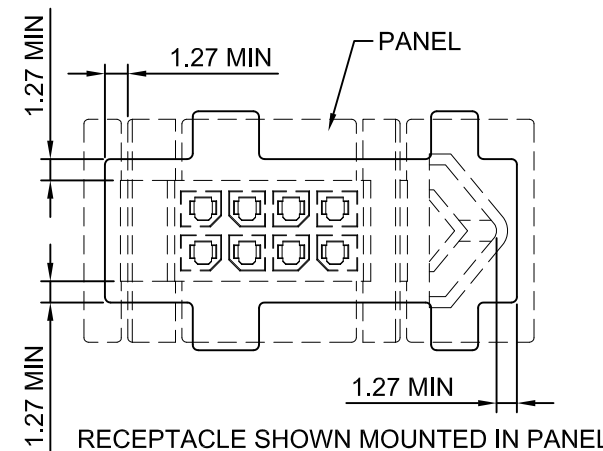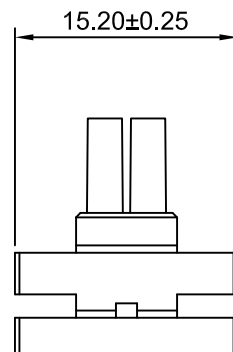

SPECIFICATIONS:

Current Rating: 12.5A AC, DC (MAX)

Voltage Rating: 600V AC, DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66, UL94V-0 (Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
C3030HFB-2x2P	24.70	3.00	13.46	22.10
C3030HFB-2x3P	27.70	6.00	16.46	25.10
C3030HFB-2x4P	30.70	9.00	19.46	28.10
C3030HFB-2x5P	33.70	12.00	22.46	31.10
C3030HFB-2x6P	36.70	15.00	25.46	34.10
C3030HFB-2x7P	39.70	18.00	28.46	37.10
C3030HFB-2x8P	42.70	21.00	31.46	40.10
C3030HFB-2x9P	45.70	24.00	34.46	43.10
C3030HFB-2x10P	48.70	27.00	37.46	46.10
C3030HFB-2x11P	51.70	30.00	40.46	49.10
C3030HFB-2x12P	54.70	33.00	43.46	52.10

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 1		
DRAWN	CHK'D	APPR	3.00mm PITCH DUAL ROW HOUSING	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A4
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°				
			C3030HFB-2xXP	

A4	CHANGE THE DRAWING	2022.08.07
A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2020.10.30
A1	CHANGE THE CURRENT RATING	2018.12.14
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE