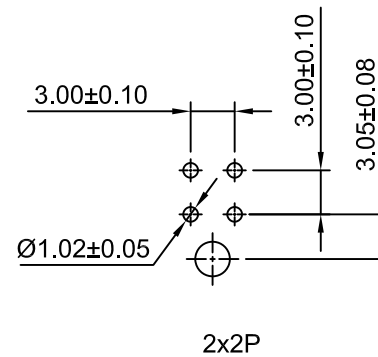
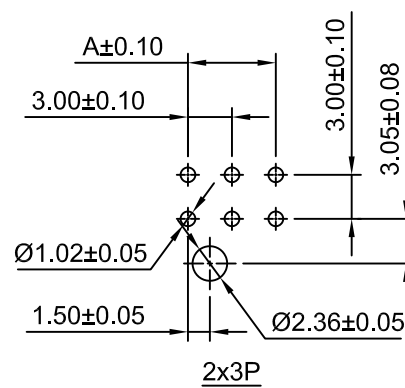
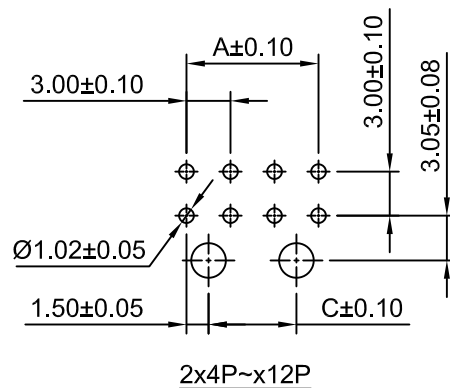


P.C.B LAYOUT

Ordering Information:

C3030HFWR-2xXP - ** - **
1 2 3

1.Part No.

2.Material:

(blank):LCP UL94V-0

GWT:LCP UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (AWG #18)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Material: LCP,UL94-V0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	3.00	6.70	---	2x8P	21.00	24.70	18.00
2x3P	6.00	9.70	---	2x9P	24.00	27.70	21.00
2x4P	9.00	12.70	6.00	2x10P	27.00	30.70	24.00
2x5P	12.00	15.70	9.00	2x11P	30.00	33.70	27.00
2x6P	15.00	18.70	12.00	2x12P	33.00	36.70	30.00
2x7P	18.00	21.70	15.00				

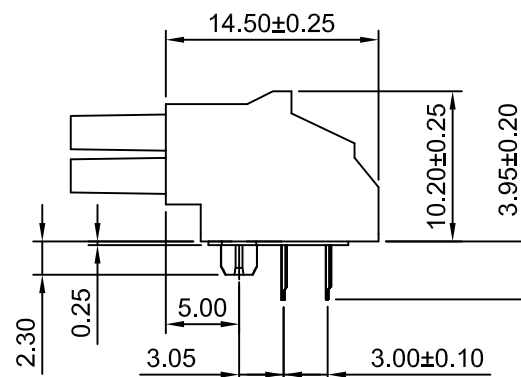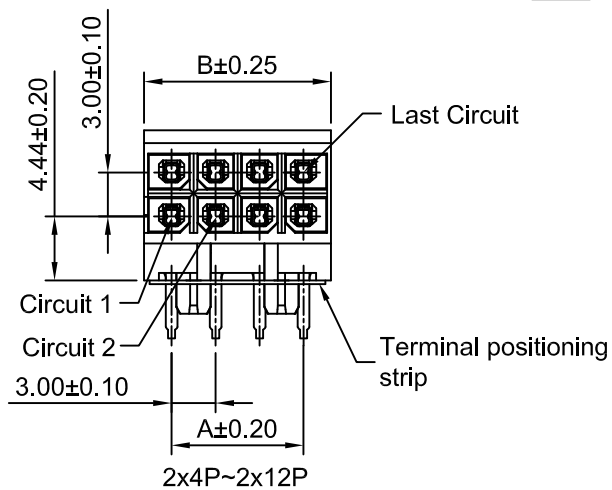

A2	CHANGE THE DRAWING	2022.01.14
A1	CHANGE THE Current Rating	2018.12.19
A0	NEW RELEASE	2013.02.27
REV	DESCRIPTION	DATE

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		2:1		1 of 1			
DRWN		CHK'D		APPR		3.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER	
Xu Lei		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
DRAWING NO.						REV A2	
C3030HFWR-2xXP							