
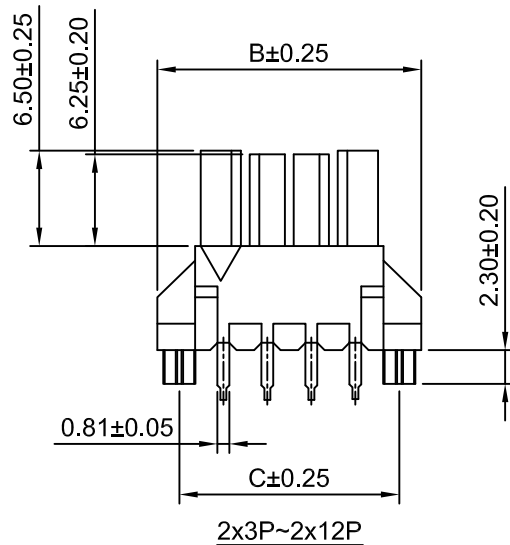
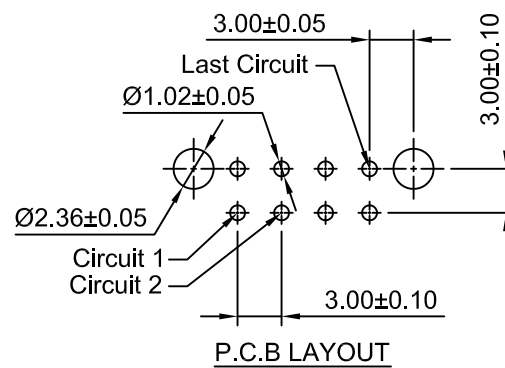
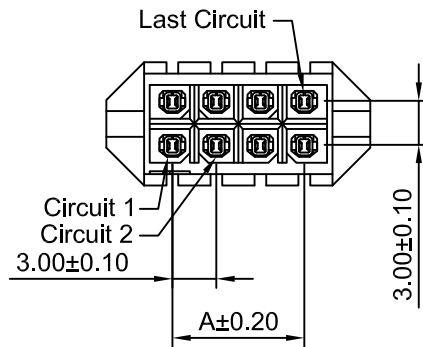


Ordering Information:
C3030HFWV-2xXP - ^{**}/₂ - ^{**}/₃

- 1.Part No.
- 2.Material:
 (blank):LCP UL94V-0
 GWT:LCP UL94V-0,GWT 750°C
- 3.Finish:
 (blank):Tin over Nickel
 G:Gold over Nickel(1"U)
 G3:Gold over Nickel(3"U)
 G15:Gold over Nickel(15"U)
 G30:Gold over Nickel(30"U)



SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #16)
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Phosphor Bronze/Tin over Nickel
 Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	3.00	12.00	9.00	2x8P	21.00	30.00	27.00
2x3P	6.00	15.00	12.00	2x9P	24.00	33.00	30.00
2x4P	9.00	18.00	15.00	2x10P	27.00	36.00	33.00
2x5P	12.00	21.00	18.00	2x11P	30.00	39.00	36.00
2x6P	15.00	24.00	21.00	2x12P	33.00	42.00	39.00
2x7P	18.00	27.00	24.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
 Scale: 2:1
 Sheet: 1 of 1

DRAWN: Haisen Li
 CHK'D: Diankui Wan
 APPR: Jack Yin

General Tolerances:
 x.xx±0.25
 x.xxx±0.20
 x.xxxx±0.15
 ANGLES ±1°



TITLE: 3.00mm Pitch
 VERTICAL Dual Row Wafer
 DRAWING NO. C3030HFWV-2xXP
 REV A4

REV	DESCRIPTION	DATE
A4	CHANGE THE DRAWING	2022.11.14
A3	CHANGE THE DRAWING	2022.01.14
A2	ADD THE SIZE OF PIN	2019.08.26
A1	CHANGE THE Current Rating	2018.12.26
A0	NEW RELEASE	2013.02.27