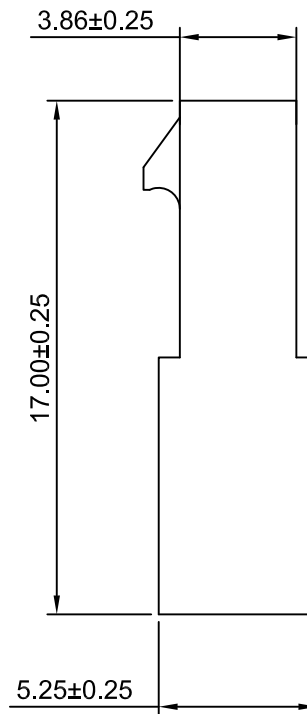
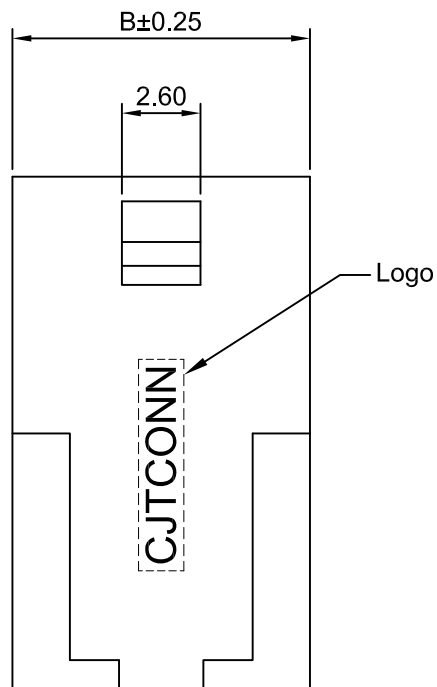
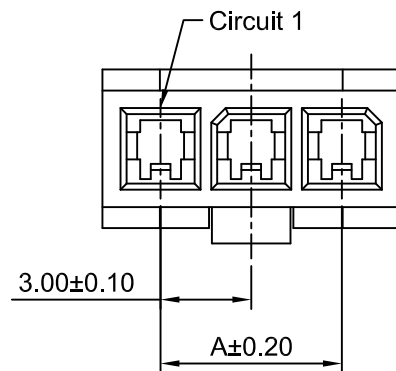


Ordering Information:

C3030HMA-XP - ** - ***
1 2 3

1.Part NO.

2.Material:

(Blank):Nylon 66 UL94V-0(Black)

GWT:Nylon 66 UL94V-0(Black),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Logo & Marking:

(Blank): With Mark

NK: Without Mark

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.00	6.85	8P	21.00	24.85
3P	6.00	9.85	9P	24.00	27.85
4P	9.00	12.85	10P	27.00	30.85
5P	12.00	15.85	11P	30.00	33.85
6P	15.00	18.85	12P	33.00	36.85
7P	18.00	21.85			


CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 2		
DRAWN	CHK'D	APPR	3.00mm Pitch Single Row Housing	
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C3030HMA-XP	A3


A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2019.12.27
A1	MODIFY DRAWING	2019.09.20
A0	NEW RELEASE	2018.12.15
REV	DESCRIPTION	DATE




2P

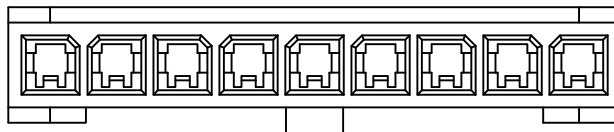


9P

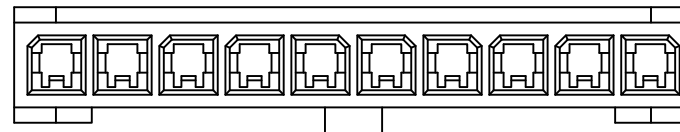


10P




3P

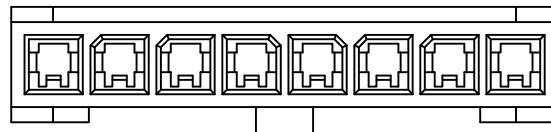


8P

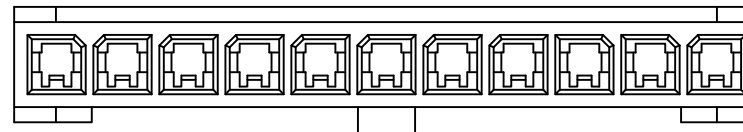


11P




4P

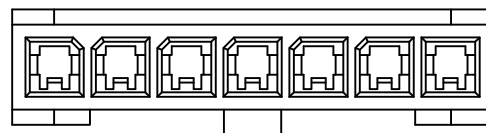


7P

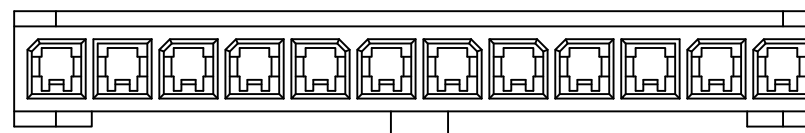

12P

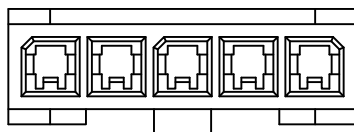

5P

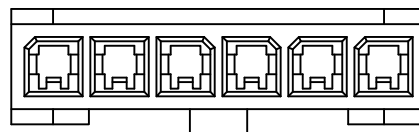

6P

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 3.00mm Pitch Single Row Housing	
mm	3:1	2 of 2		
DRWN	CHK'D	APPR	DRAWING NO. C3030HMA-XP	
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	REV A3	
x,x $\pm$ 0.25 x,xx $\pm$ 0.20 x,xxx $\pm$ 0.15 ANGLES $\pm$ 1°				

A3	CHANGE THE DRAWING	2022.01.14
A2	CHANGE THE DRAWING	2019.12.27
A1	MODIFY DRAWING	2019.09.20
A0	NEW RELEASE	2018.12.15
REV	DESCRIPTION	DATE