
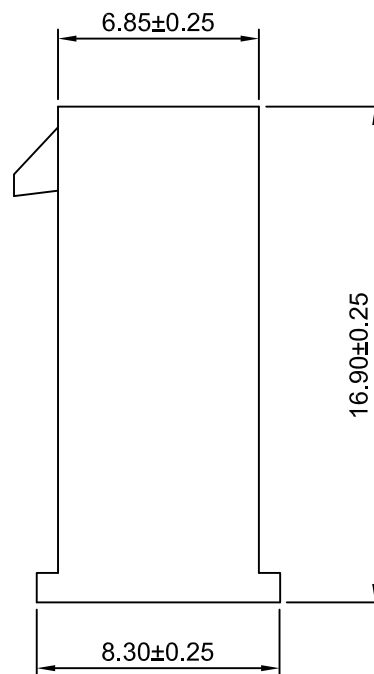
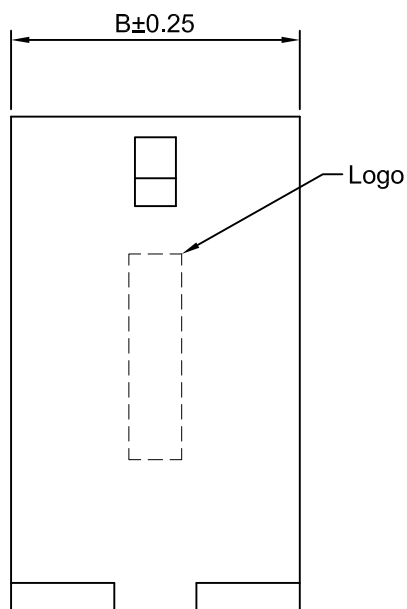


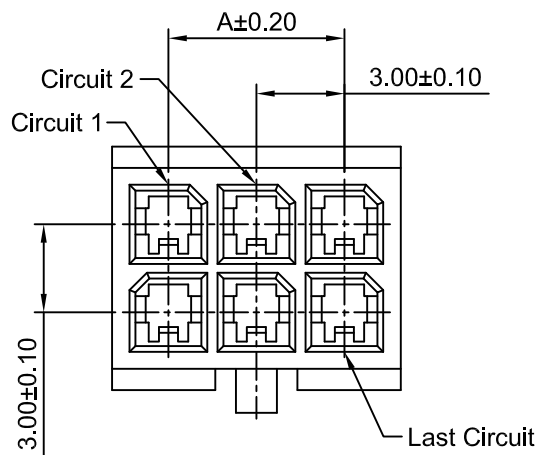

Ordering Information:

C3030HMC-2xXP - **_ ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66 UL94V-0(Black)

V2: Nylon 66,UL94V-2(Black)


GWT: Nylon 66,UL94V-0(Black),IEC 60335-1,5th Edition

Glow Wire Capable.

3.Logo & Marking:

(Blank): With Mark

NK: Without Mark



SPECIFICATIONS:

Current Rating: 8.5A AC,DC (MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	----	3.85	2x7P	18.00	21.85
2x2P	3.00	6.85	2x8P	21.00	24.85
2x3P	6.00	9.85	2x9P	24.00	27.85
2x4P	9.00	12.85	2x10P	27.00	30.85
2x5P	12.00	15.85	2x11P	30.00	33.85
2x6P	15.00	18.85	2x12P	33.00	36.85

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 2		3.00mm PITCH	
DRWN		CHK'D		APPR		Dual Row HOUSING	
Chengbiao Ye		Diankui Wan		Jack Yin		DRAWING NO.	
General Tolerances		THIRD ANGLE PROJECTION		C3030HMC-2xXP		REV A5	
x.xx±0.25							
x.xxx±0.20							
x.xxxx±0.15							
ANGLES ±1°							


A5	CHANGE THE DRAWING	2023.03.07
A4	CHANGE THE DRAWING	2023.01.10




2x1P




2x2P




2x3P




2x4P




2x5P

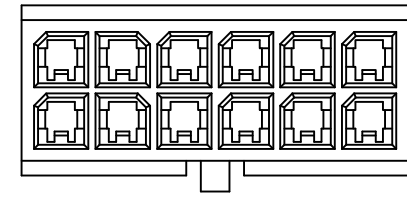


2x6P

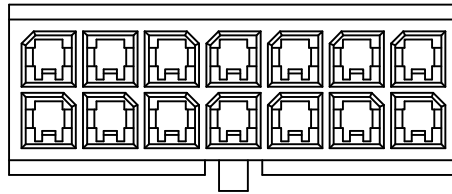


2x7P

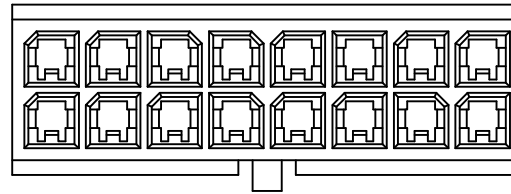


2x8P

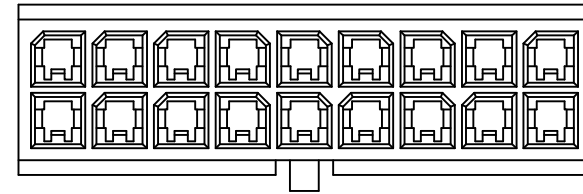


2x9P

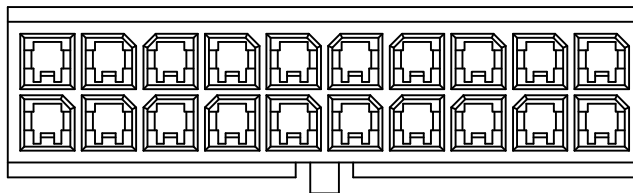

2x10P

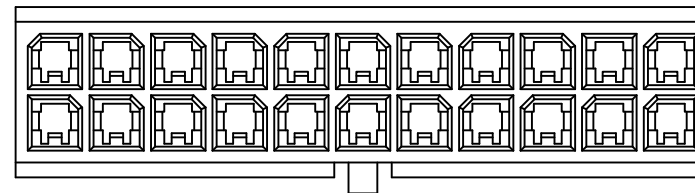

2x11P

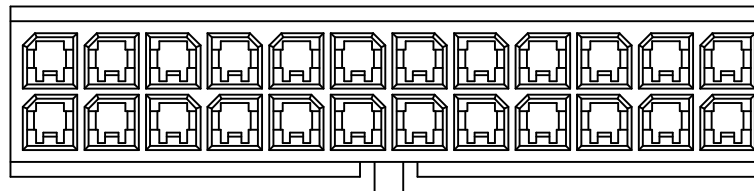

2x12P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	4:1	2 of 2		
DRWN	CHK'D	APPR	3.00mm PITCH	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	Dual Row HOUSING	
x.x±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
		DRAWING NO.	REV A5	
		C3030HMC-2xXP		

A5	CHANGE THE DRAWING	2023.03.07
A4	CHANGE THE DRAWING	2023.01.10