

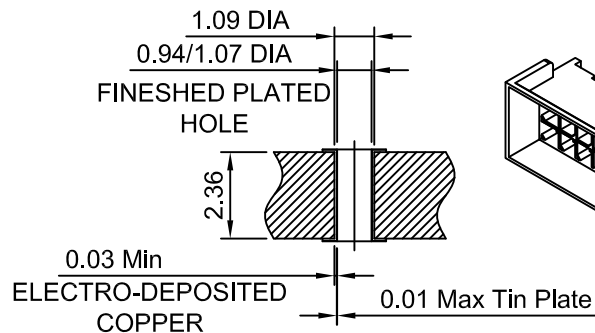


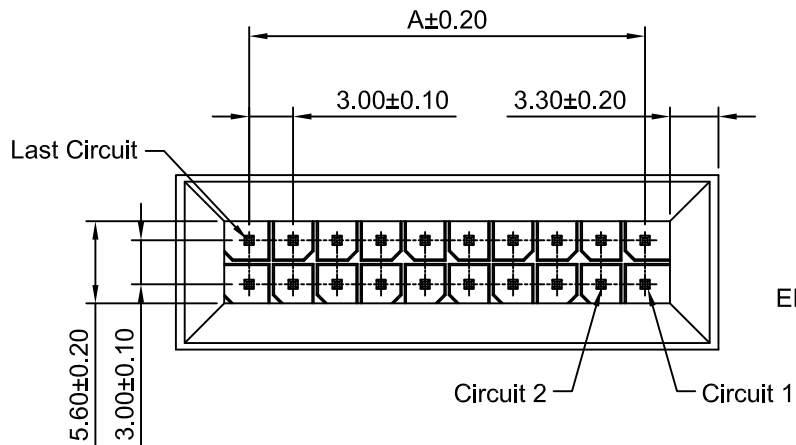

SEC:A-A
SCALE 2.5:1



Ordering Information:

C3030WVD-2xXP - ***
1 2

1.Part NO.

2.Pin Finish:

(blank): Tin over Nickel

G: Gold over Nickel(Au:1u",Mating Area)

G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min





Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Housing Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C3030WVD-2x2P	3.00	13.00
C3030WVD-2x3P	6.00	16.00
C3030WVD-2x4P	9.00	19.00
C3030WVD-2x5P	12.00	22.00
C3030WVD-2x6P	15.00	25.00
C3030WVD-2x7P	18.00	28.00
C3030WVD-2x8P	21.00	31.00
C3030WVD-2x9P	24.00	34.00
C3030WVD-2x10P	27.00	37.00
C3030WVD-2x11P	30.00	40.00
C3030WVD-2x12P	33.00	43.00

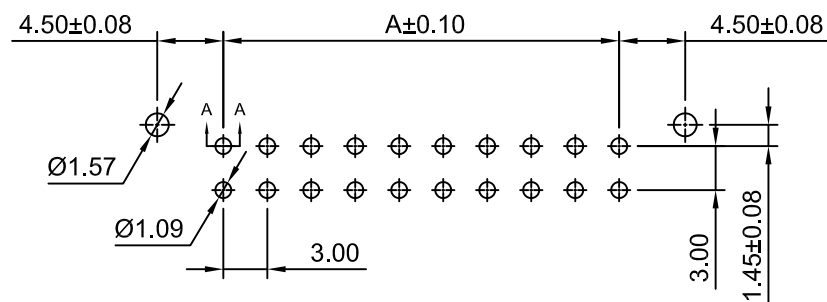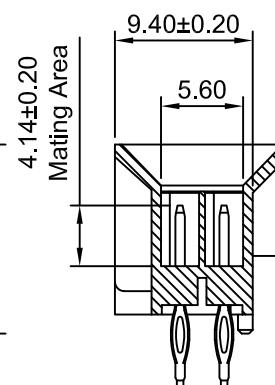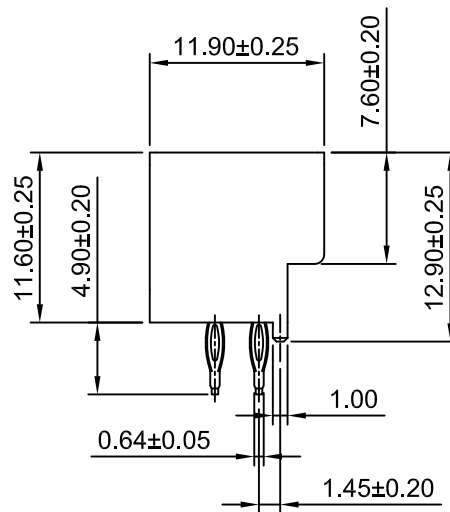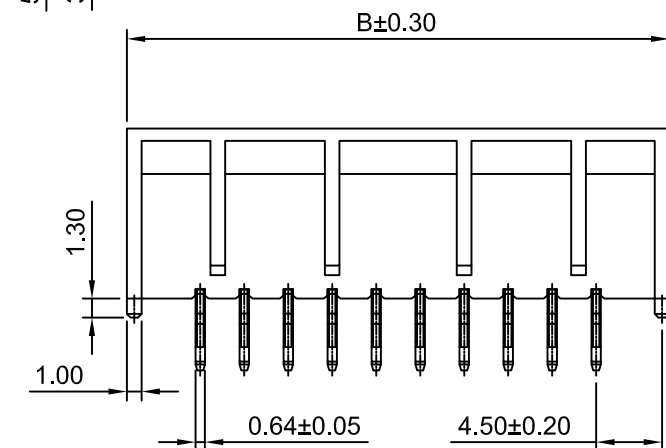

P.C.B LAYOUT
TOLERANCE: ±0.05

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

REV	DESCRIPTION	DATE
A5	CHANGE THE DRAWING	2022.11.14
A4	CHANGE THE DRAWING	2022.01.14
A3	ADD THE SHEET 2	2020.08.11
A2	ADD THE SIZE	2020.07.31
A1	CHANGE THE CURRENT RATING	2018.12.26
A0	NEW RELEASE	2013.02.27

Unit	Scale	Sheet
mm	2:1	1 of 2
DRAWN	CHKD	APPR
Haisen Li	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°		

TITLE	
3.00mm PITCH DUAL ROW VERTICAL BMI CPI HEADER-ASSY,LEAD-FREE	
DRAWING NO.	REV
C3030WVD-2xXP	A5