
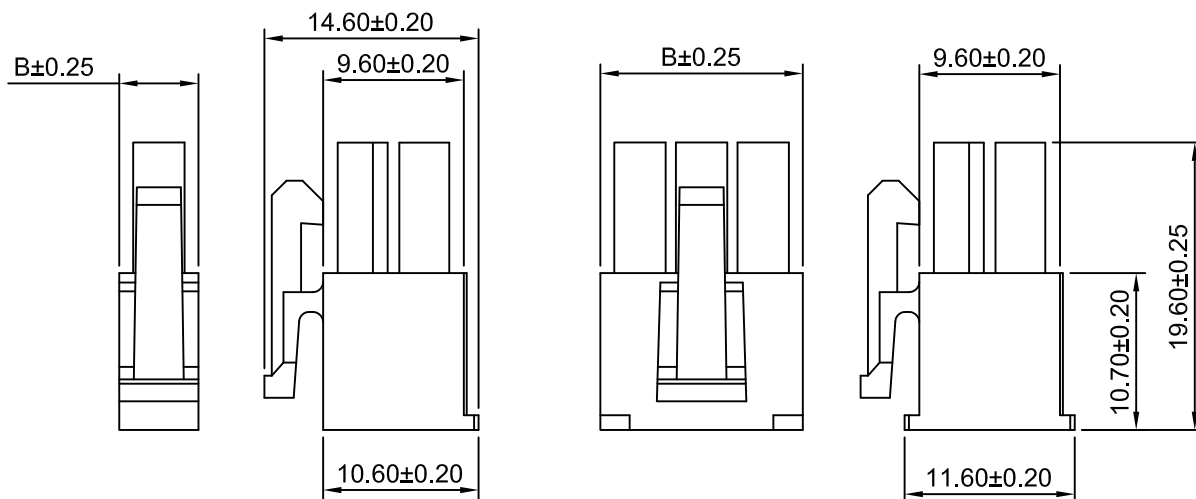


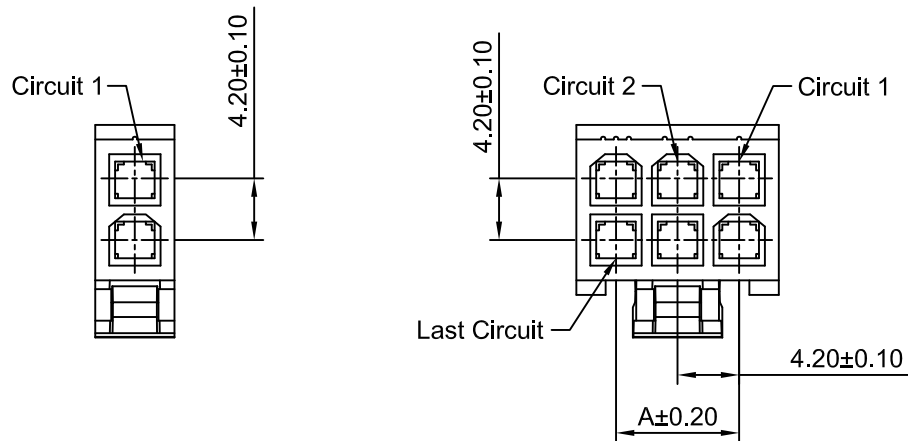

2x1P

2x2P~2x12P

Ordering Information:

C4201HF-2xXP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank):Nylon 66 UL94V-2(Natural)

46: Nylon 46,UL94V-0 (Beige)

V0:Nylon 66 UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank):see section 2 material


BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

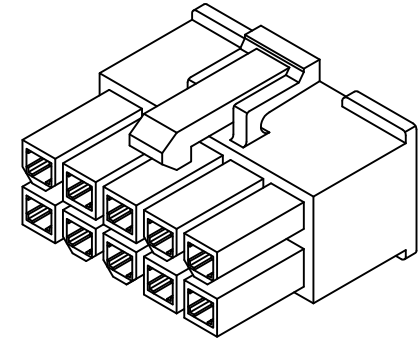

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

REV	DESCRIPTION	DATE
A5	CHANGE THE DRAWING	2022.05.16
A4	CHANGE THE DRAWING	2022.04.22
A3	CHANGE THE SIZE & INFORMATION	2019.12.09
A2	Drawing revision	2016.06.08
A1	Change tolerance	2014.07.25

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
ZhenNing Luo	Djankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION 
x.x±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

TITLE	
4.20mm PITCH DUAL ROW HOUSING	
DRAWING NO.	REV
C4201HF-2xXP	A5