

Ordering Information:

C4201HF-XP - ** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank):Nylon 66 UL94V-2(Natural)

V0:Nylon 66 UL94V-0(White)

GWT:Nylon 66 UL94V-0(Beige),IEC
60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank):see section 2 material

BK:Black

RD:Red

YL:Yellow






BL:Blue

GN:Green


4.Logo & Marking:

(Blank): Without Mark

WM: With Mark

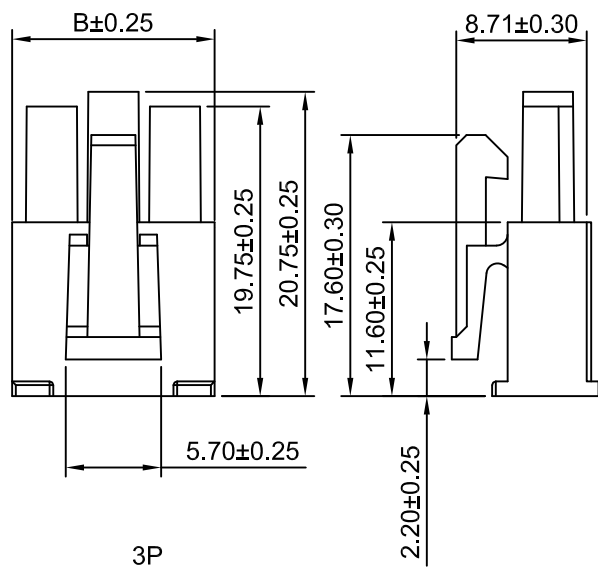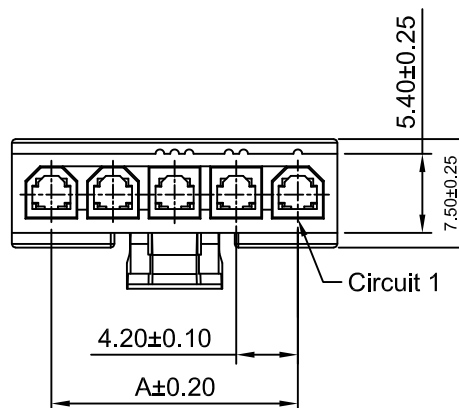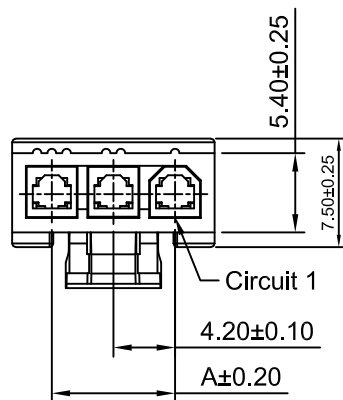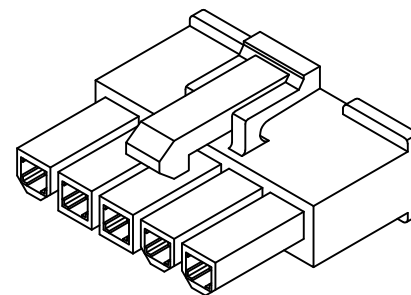

3P

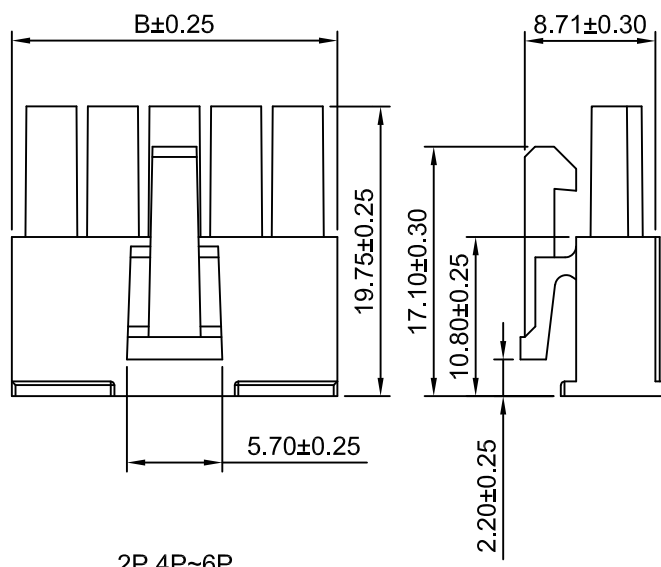

2P,4P~6P

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	5P	16.80	22.20
3P	8.40	13.80	6P	21.00	26.40
4P	12.60	18.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	4.20mm Pitch Single Row Housing		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin	DRAWING NO. C4201HF-XP		
General Tolerances	THIRD ANGLE PROJECTION				REV A5
A5	CHANGE THE DRAWING	2023.07.21			
A4	CHANGE THE DRAWING	2022.04.22			
A3	CHANGE THE DRAWING	2021.11.26			
A2	CHANGE THE INFORMATION	2019.12.14			
A1	DELETE THE SIZE OF 7P~12P	2019.10.21			
A0	NEW RELEASE	2005.05.24			
REV	DESCRIPTION	DATE			