

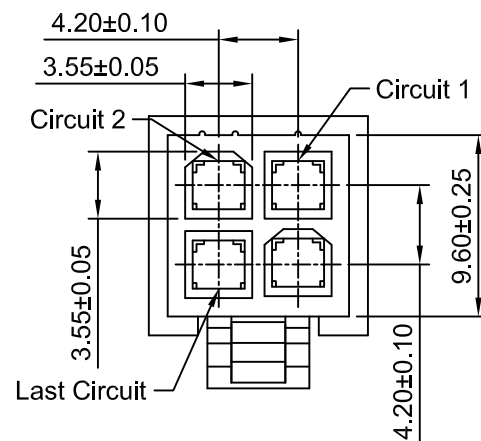
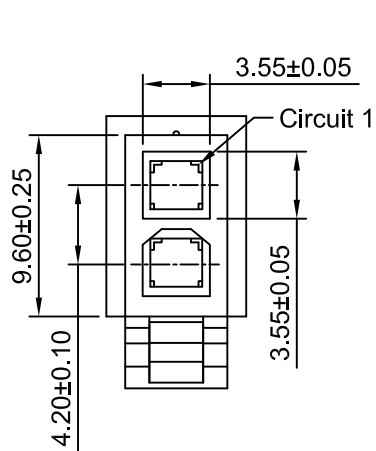
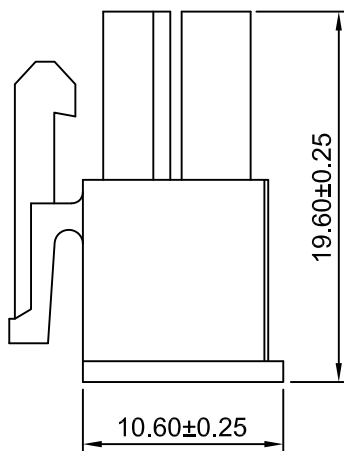


2x1P

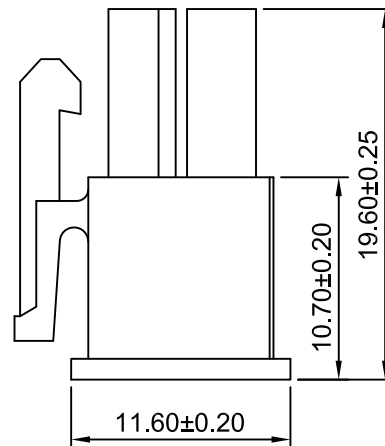

2x2P

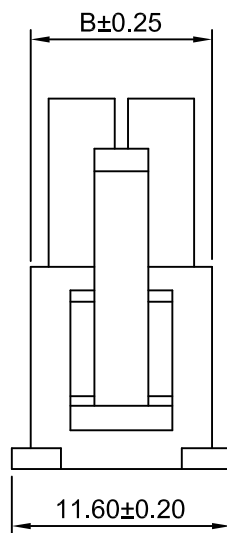

Ordering Information:
C4201HFC-2xXP - *** - **
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(Blank):Natural

BK:Black

GN:Green

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2 (Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x2P	4.20	9.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

Title :
4.20mm PITCH
DUAL ROW HOUSING

A2	CHANGE THE INFORMATION	2019.12.14
A1	Version update	2017.12.07
A0	NEW RELEASE	2015.03.05
REV	DESCRIPTION	DATE

General Tolerance	PROJECT
x.x±0.25 x.xx±0.20 x.xxx±0.15	

DRAW NO : C4201HFC-2xXP	REV A2
-------------------------	--------