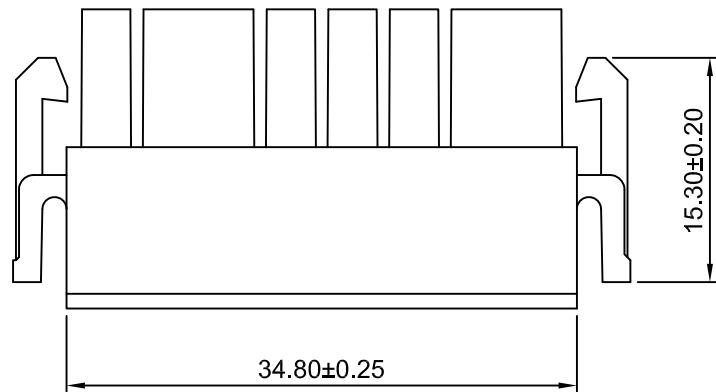
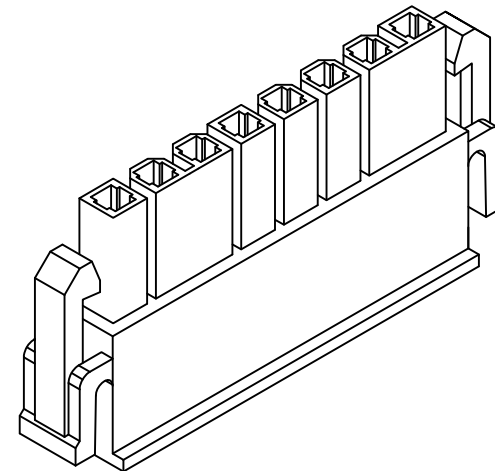
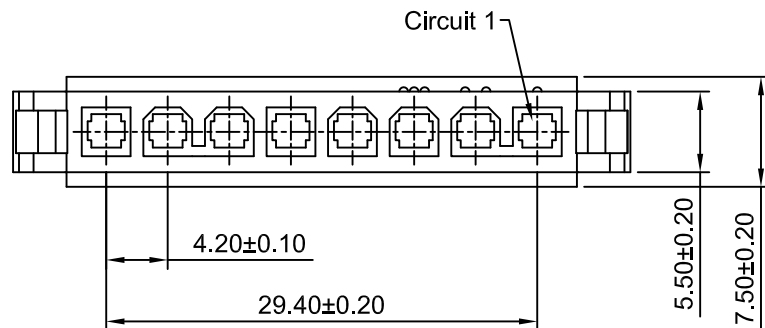


SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(Black)

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1			
DRWN	CHK'D	APPR	4.20mm PITCH SINGLE ROW HOUSING		
Dengchun Yi	Dlankul Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201HFD-8P		
x.xx±0.25					
x.xx±0.20					
x.xxx±0.15					
ANGLES ±1°			REV A1		