
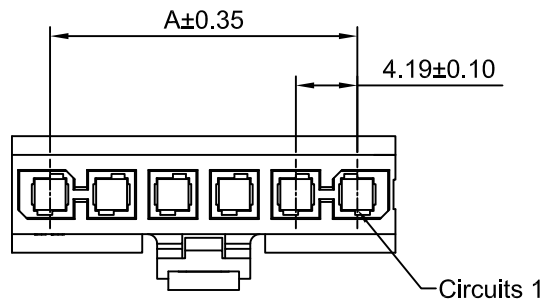
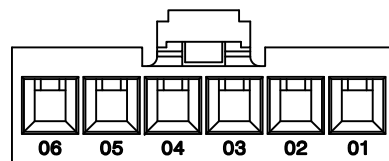
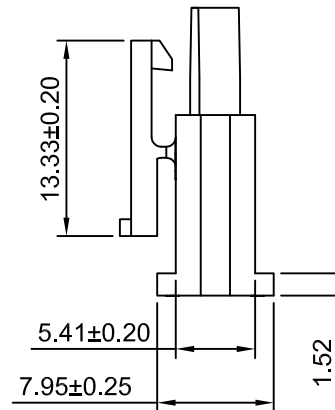
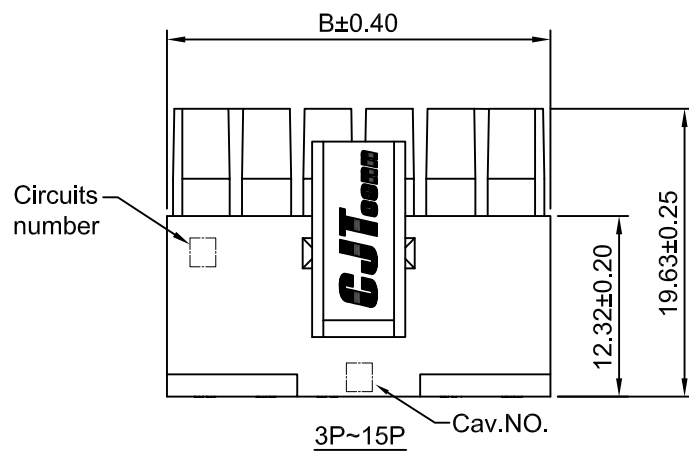


2P



SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -55°C ~ +105°C
Contact Resistance: 10mΩ Max
After environmental testing: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.19	9.40	9P	33.52	38.73
3P	8.38	13.59	10P	37.71	42.92
4P	12.57	17.78	11P	41.90	47.11
5P	16.76	21.97	12P	46.09	51.30
6P	20.95	26.16	13P	50.28	55.49
7P	25.14	30.35	14P	54.47	59.68
8P	29.33	34.54	15P	58.66	63.87

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	
DRAWN	CHKD	APPR	4.19mm PITCH
Haisen Li	Djankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1	CHANGE THE DRAWING	2023.02.06	
A0	NEW RELEASE	2015.03.11	SINGLE ROW HOUSING
REV	DESCRIPTION	DATE	
			DRAWING NO.
			C4201HFS-XP
			REV
			A1