

Ordering Information:

C4201HM-2xXP-A - $\frac{**}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 66 UL94V-2(Natural)

V0: Nylon 66 UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th
Edition Glow Wire Capable.

3.Color:

(Blank): see section 2 material





BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

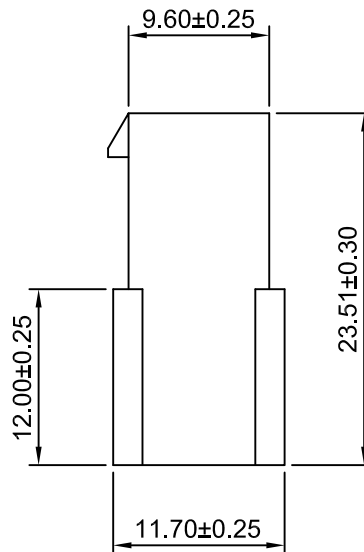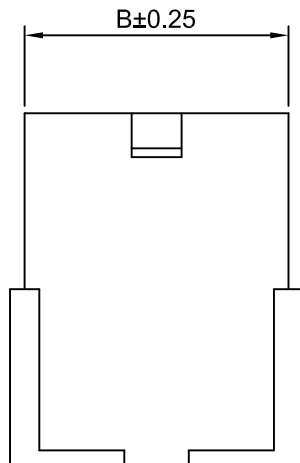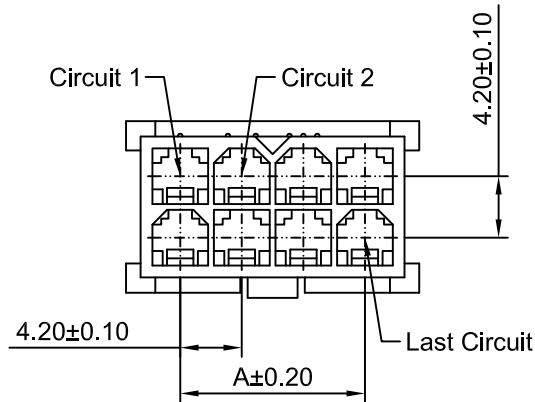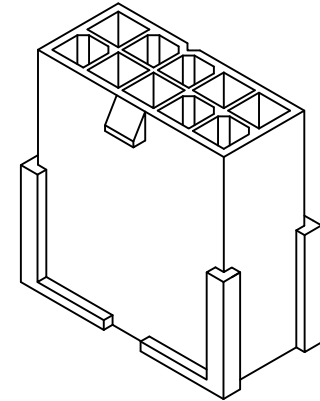

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		2:1		1 of 2			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin		4.20mm PITCH DUAL ROW HOUSING	
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x,x±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				C4201HM-2xXP-A			


A3	CHANGE THE DRAWING	2023.07.03
A2	CHANGE THE INFORMATION	2019.12.14
A1	CHANGE TOLERANCE	2014.07.25
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE




2x1P




2x2P




2x3P




2x4P

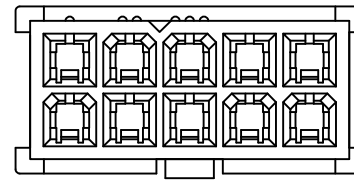


2x5P

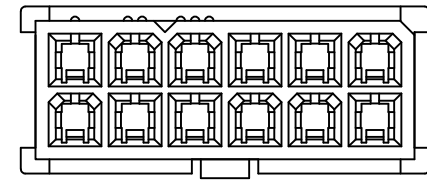


2x6P

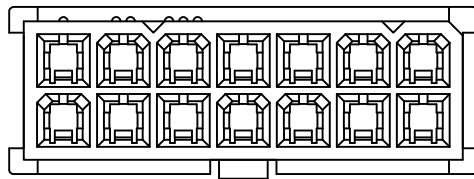


2x7P

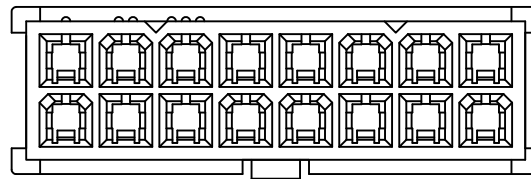


2x8P

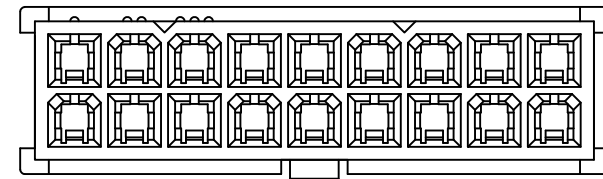


2x9P

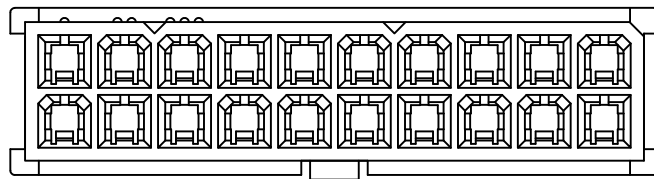

2x10P

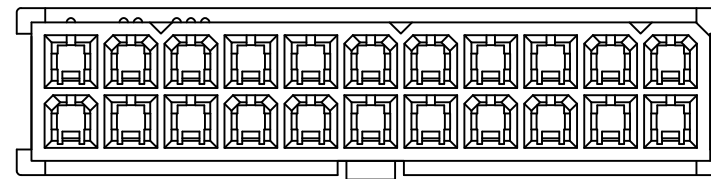

2x11P

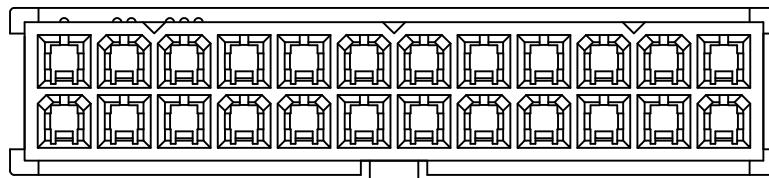

2x12P

A3	CHANGE THE DRAWING	2023.07.03
A2	CHANGE THE INFORMATION	2019.12.14
A1	CHANGE TOLERANCE	2014.07.25
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	2 of 2	
DRAWN	CHKD	APPR	4.20mm PITCH DUAL ROW HOUSING
Chengbiao Ye	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201HM-2xXP-A
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			
			REV A3