

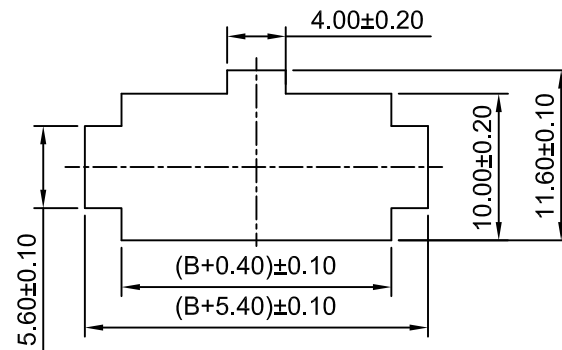
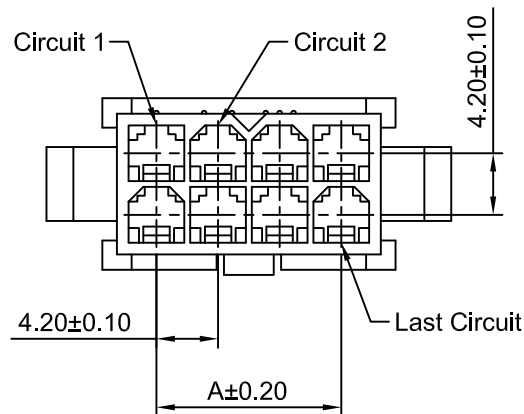


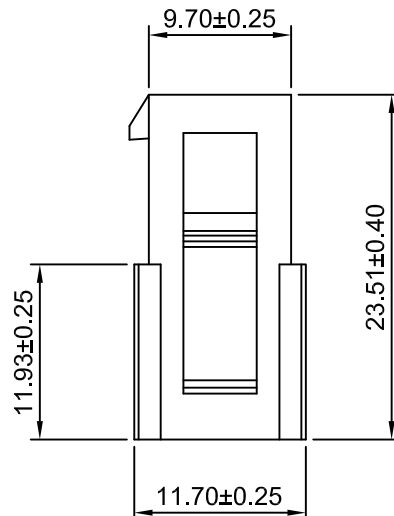


RECOMMENDED PANEL CUT-OUT
(DESIGNED FOR 0.80mm TO 2.00mm THICK
STAMPED PANEL OR PRINTED CIRCUIT BOARD)

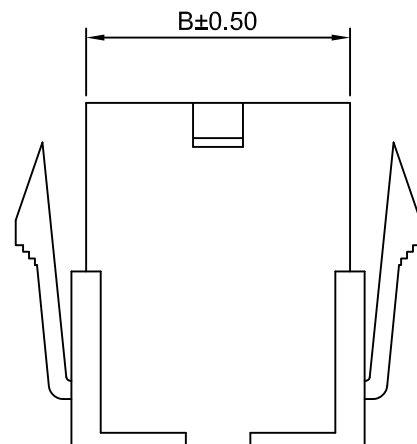

Ordering Information:
C4201HM-2xXP - $\frac{***}{1} - \frac{**}{2} - \frac{***}{3} - \frac{***}{4}$

- Part NO.
- Material:
(Blank): Nylon 66,UL94V-2
V0: Nylon 66,UL94V-0
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- Color:
(Blank):Natural
BK:Black BL:Blue
RD:Red YL:Yellow
GN:Green
- Logo & Marking:
(Blank): Without LOGO
CJT: With LOGO



SPECIFICATIONS:
Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 2:1	Sheet 1 of 1	TITLE 4.20mm PITCH DUAL ROW HOUSING	
DRAWN Haisen Li	CHKD Diankui Wan	APPR Jack Yin		
General Tolerances x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION 	
DRAWING NO. C4201HM-2xXP			REV A3	

A3	CHANGE THE SIZE & INFORMATION	2015.05.09
A2	Modify the size	2015.05.09
A1	Change tolerance	2014.07.25
REV	DESCRIPTION	DATE