

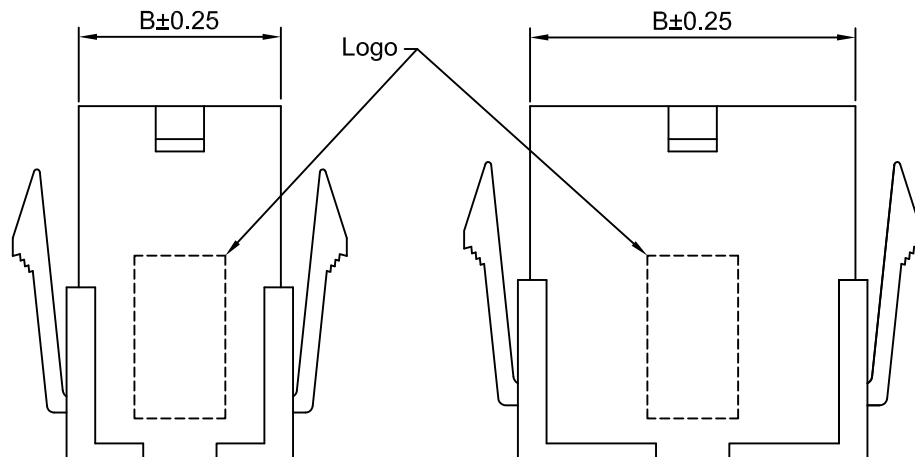

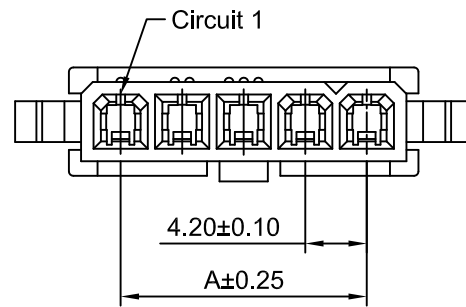


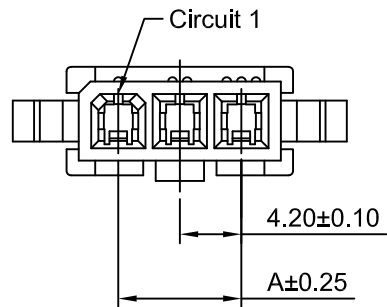

3P

2P,4P~6P

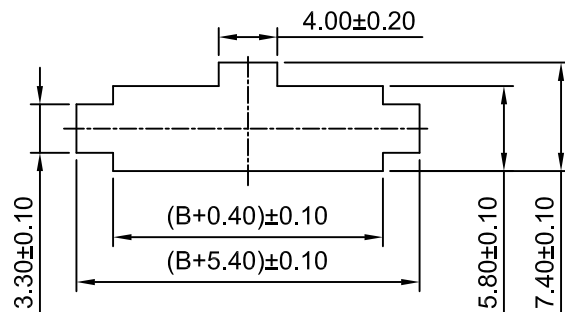

RECOMMENDED PANEL CUT-OUT
(DESIGNED FOR 0.80mm TO 2.00mm THICK
STAMPED PANEL OR PRINTED CIRCUIT BOARD)

Ordering Information:

C4201HM-XP - ** - ** - **
1 2 3 4

- Part NO.
- Material:
(Blank):Nylon 66 UL94V-2(Natural)
V0:Nylon 66 UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- Color:
(Blank):see section 2 material
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green
- Logo & Marking:
(Blank): Without Mark
WM: With Mark

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	5P	16.80	22.20
3P	8.40	13.80	6P	21.00	26.40
4P	12.60	18.00			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	4.20mm Pitch Single Row Housing	
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A3
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			C4201HM-XP	

A3	CHANGE THE DRAWING	2023.03.13
A2	CHANGE THE INFORMATION	2019.12.14
A1	DELETE THE SIZE OF 7P~12P	2019.10.21
A0	NEW RELEASE	2012.11.13
REV	DESCRIPTION	DATE