

### Ordering Information:

C4201HMA-XP - \*\* - \*\*  
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(Blank):Natural



BK:Black

RD:Red


YL:Yellow

BL:Blue

GN:Green

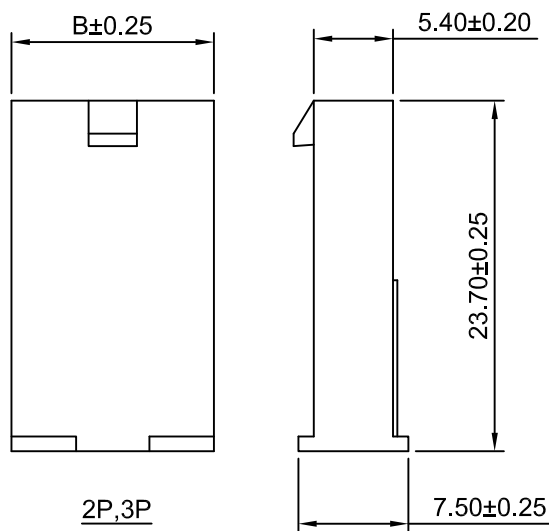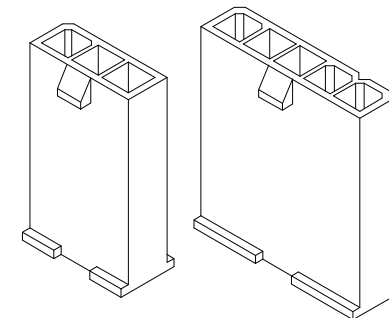

2P,3P

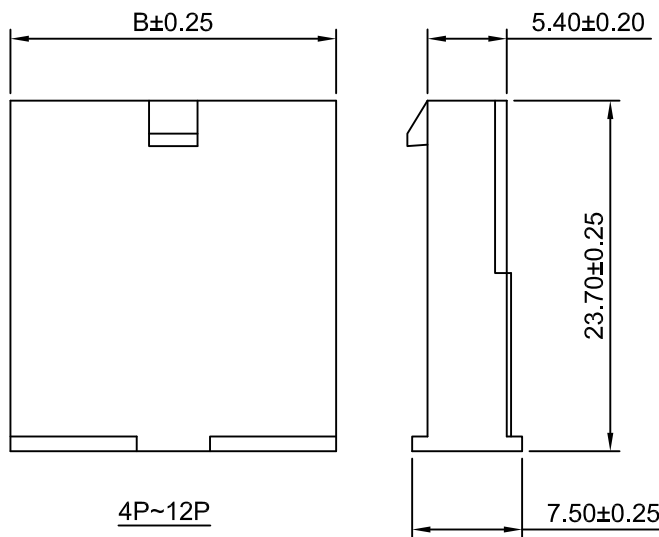

4P~12P

### SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 4.20           | 9.80  | 5P       | 16.80          | 22.40 |
| 3P       | 8.40           | 14.00 | 6P       | 21.00          | 22.60 |
| 4P       | 12.60          | 18.20 |          |                |       |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

|                                                      |                      |                                                                                       |                                    |           |  |
|------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------|------------------------------------|-----------|--|
| Unit                                                 | Scale                | Sheet                                                                                 | TITLE                              |           |  |
| mm                                                   | 2:1                  | 1 of 1                                                                                | 4.20mm PITCH<br>SINGLE ROW HOUSING |           |  |
| DRAWN<br>Zhen Shi                                    | CHK'D<br>Diankui Wan | APPR<br>Jack Yin                                                                      |                                    |           |  |
| General Tolerances                                   |                      | THIRD ANGLE<br>PROJECTION                                                             | DRAWING NO.<br><br>C4201HMA-XP     | REV<br>A3 |  |
| x.xx±0.25<br>x.xxx±0.20<br>x.xxxx±0.15<br>ANGLES ±1° |                      |  |                                    |           |  |