


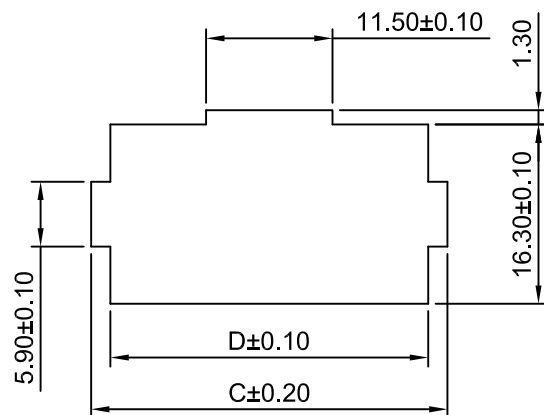
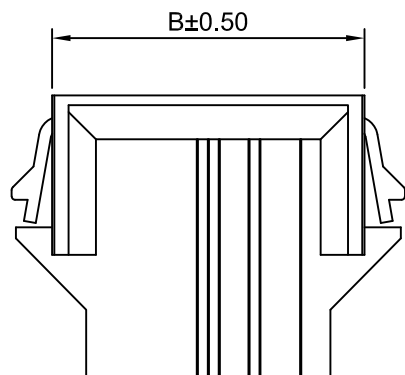
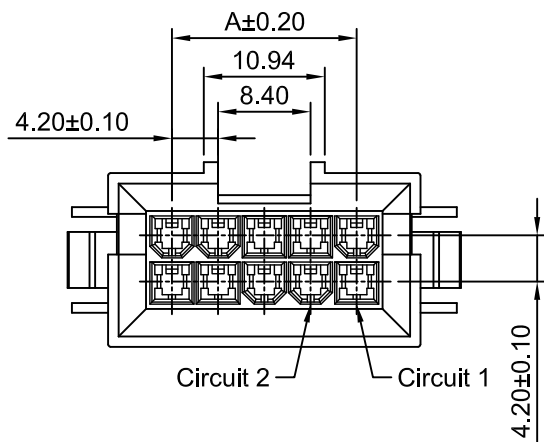




RECOMMENDED PCB CUTOUT
PANET THICKNESS 1.60

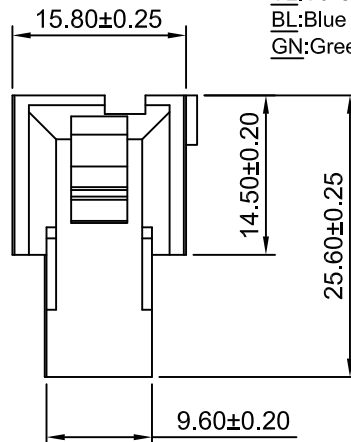

2x2P



2x2P-A

Ordering Information:
C4201HMB-2xXP - $\frac{*}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$ - $\frac{***}{4}$

1.Part No.

2.Style:

(Blank): Type 1

A: Type 2

3.Material:

(Blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

4.Color:

(Blank):Natural


BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green



SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			
	A	B	C	D
2x2P	4.20	15.80	19.80	16.30
2x3P	8.40	20.00	24.00	20.50
2x4P	12.60	24.20	28.20	24.70
2x5P	16.80	28.40	32.40	28.90
2x6P	21.00	32.60	36.60	33.10
2x7P	25.20	36.80	40.80	37.30
2x8P	29.40	41.00	45.00	41.50
2x9P	33.60	45.20	49.20	45.70
2x10P	37.80	49.40	53.40	49.90
2x11P	42.00	53.60	57.60	54.10
2x12P	46.20	57.80	61.80	58.30
2x18P	71.40	83.00	87.00	83.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		1:5:1		1 of 1			
DRWN		CHK'D		APPR		4.20mm Pitch Dual Row Housing With Panel Mount Ears	
Wenmin Luo		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. C4201HMB-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°							
REV				REV		REV	
A1				A2		A3	

A2	CHANGE THE DRAWING	2021.02.20
A1	CHANGE THE INFORMATION	2019.12.14
A0	NEW RELEASE	2012.11.15
REV	DESCRIPTION	DATE