
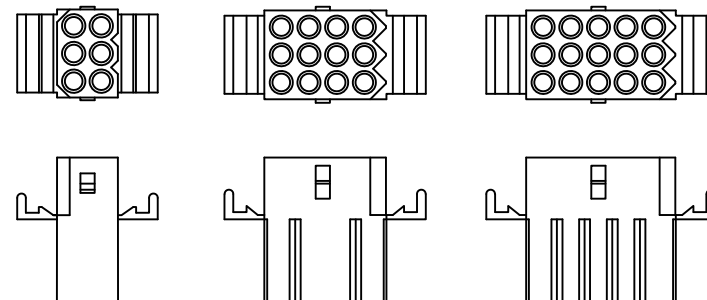
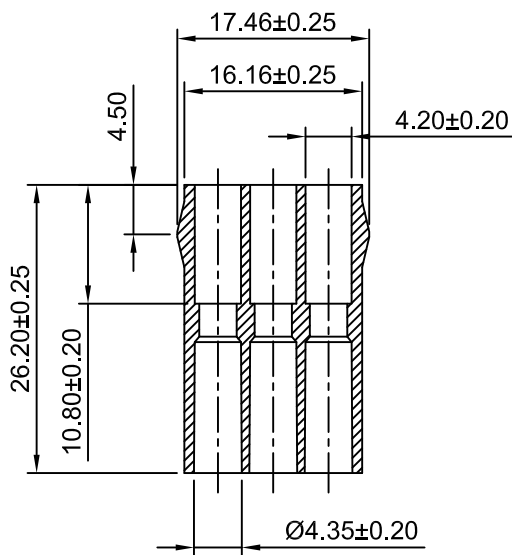
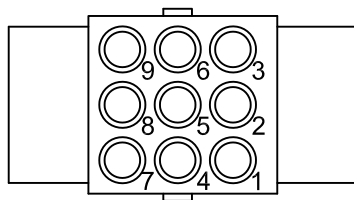
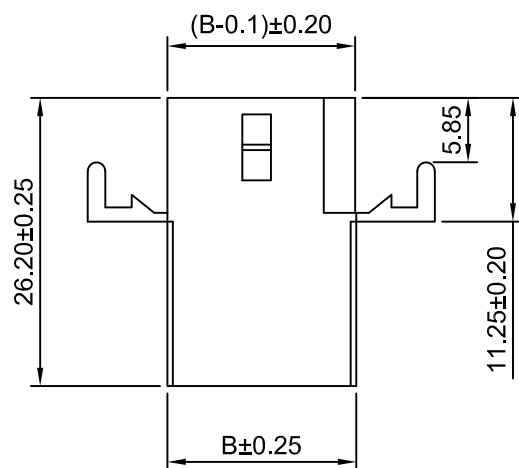


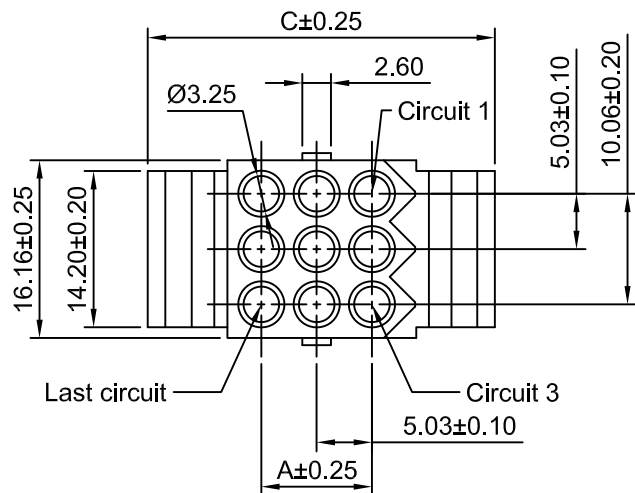

Ordering Information:

C5030HFB-3xXP - **
1 2

1.Part No.

2.Material:

(Blank):UL94V-2/Natural

V0:UL94V-0/White

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
3x2P	5.03	11.14	25.54	3x4P	15.09	22.20	36.60
3x3P	10.06	17.17	31.57	3x5P	20.12	27.23	41.63

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
DRAWN	CHK'D	APPR
Wenmin Luo	Diankui Wan	Jack Yin

5.03mm PITCH
HOUSING

General Tolerances		THIRD ANGLE PROJECTION
A1	CHANGE THE DRAWING	
A0	NEW RELEASE	
REV	DESCRIPTION	

DRAWING NO.

C5030HFB-3xXP

REV
A1