
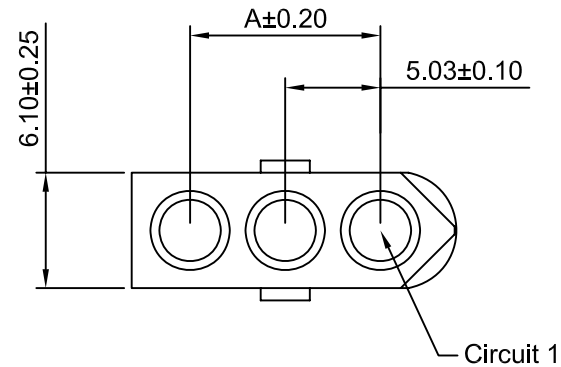


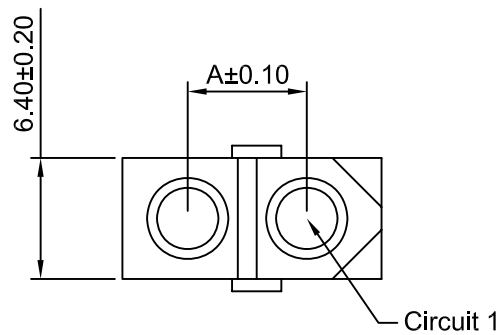

Ordering Information:


C5030HFC-XP - **
1 2

1.Part No.


2.Material:

(blank):UL94V-2/Natural


V0:UL94V-0/White

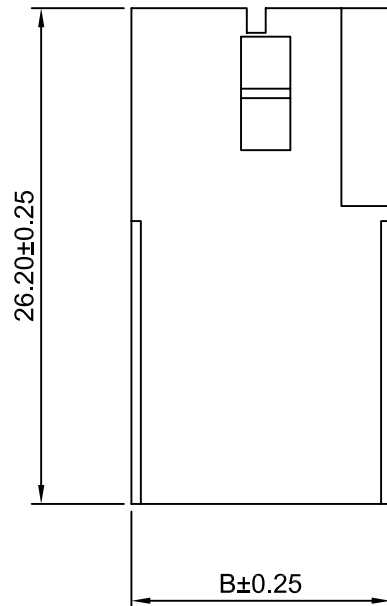

2P

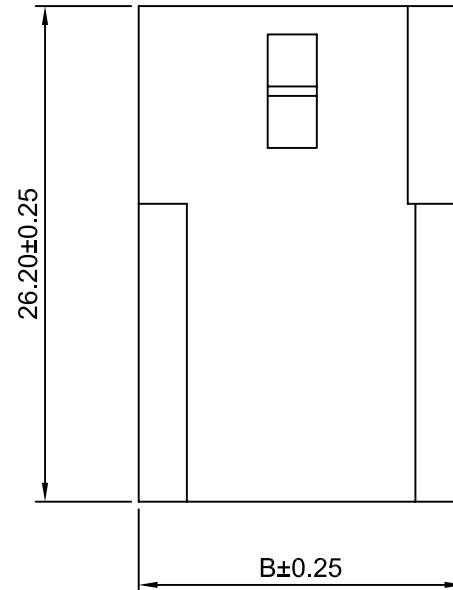

3P~5P

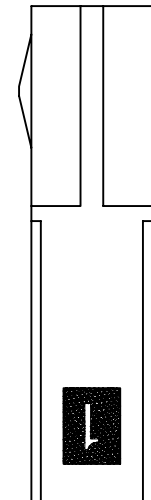

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	6.30	13.70	4P	15.09	22.20
3P	10.06	17.17	5P	20.12	27.23

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1

Draw BY:	Approved :
YanKing	GONGYB

Title :		5.03mm PITCH	
		HOUSING	
DRAW NO :		C5030HFC-XP	REV A0

General Tolerance		
x.xs0.25	ANGLE±	
x.xx0.20		
x.xxx0.15		
A0	NEW RELEEASE	2015.04.10
REV	DESCRIPTION	DATE