



1P

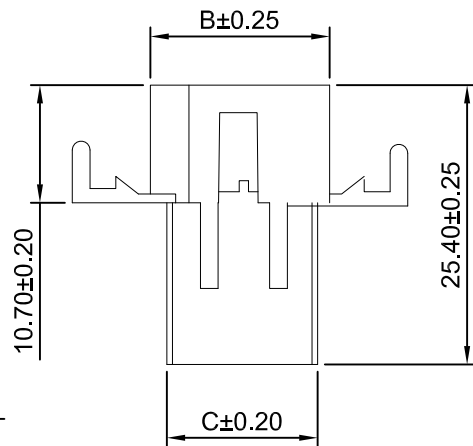

2P

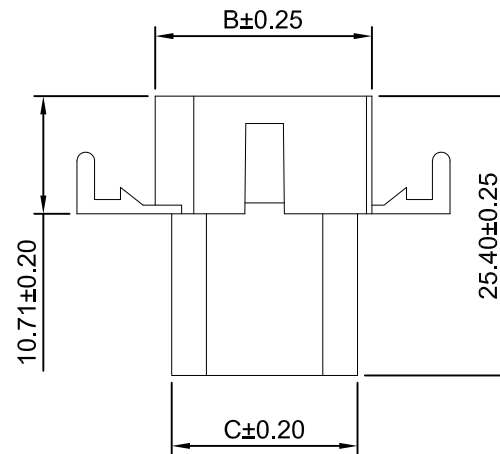

3P~5P

#### Ordering Information:

C5030HM-XP - \*\*  
1 2

1.Part No.

2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

#### SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       |       | Circuits | Dimensions(mm) |       |       |
|----------|----------------|-------|-------|----------|----------------|-------|-------|
|          | A              | B     | C     |          | A              | B     | C     |
| 1P       | ---            | 9.10  | 6.10  | 4P       | 15.09          | 24.70 | 21.90 |
| 2P       | 6.30           | 16.30 | 13.70 | 5P       | 20.12          | 29.73 | 26.93 |
| 3P       | 10.06          | 19.67 | 16.87 |          |                |       |       |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

|          |            |        |
|----------|------------|--------|
| Unit     | Scale      | Sheet  |
| mm       | 1:5:1      | 1 of 1 |
| Draw BY: | Approved : |        |
| YanKing  | GONGYB     |        |

Title :

5.03mm PITCH

HOUSING

DRAW NO : C5030HM-XP

REV  
A0

| General Tolerance |             |            | ANGLE± |
|-------------------|-------------|------------|--------|
| A0                | NEW RELEESA | 2015.04.10 |        |
| REV               | DESCRIPTION | DATE       |        |