
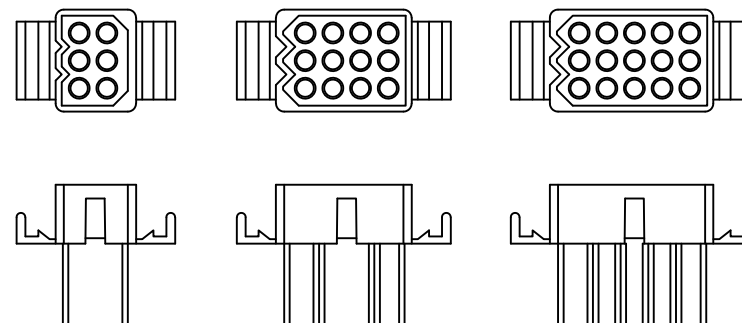
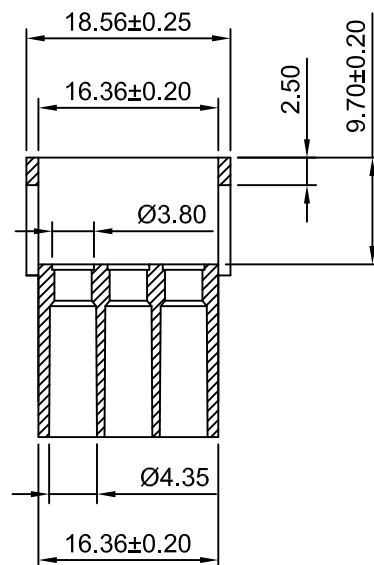
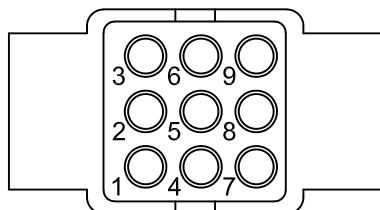
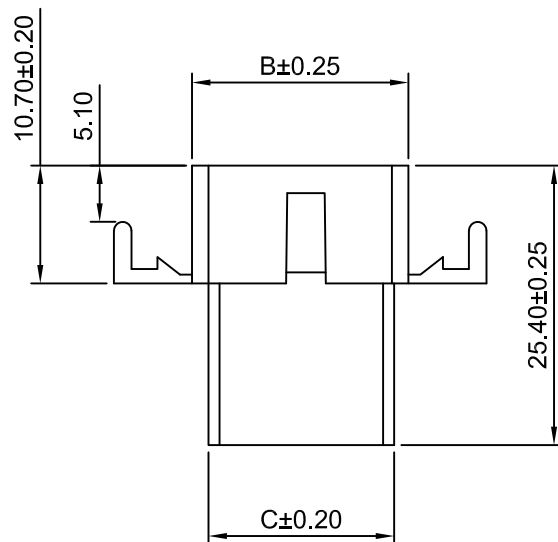


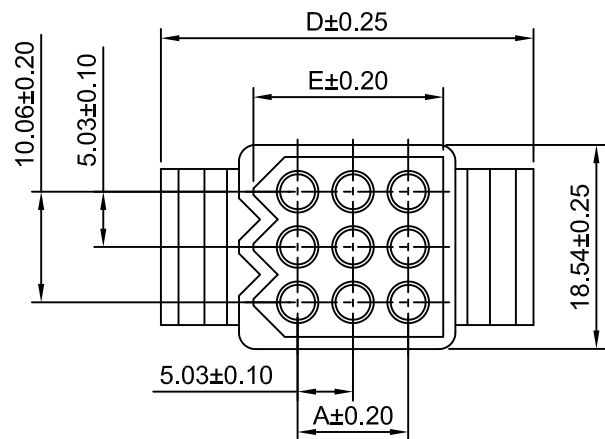

Ordering Information:

C5030HMB-3xXP - **
1 2

1.Part No.

2.Material:

(Blank):UL94V-2/Natural
V0:UL94V-0/White

SPECIFICATIONS:

Current Rating:12A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				
	A	B	C	D	E
3x2P	5.03	13.64	11.84	27.84	11.24
3x3P	10.06	19.67	16.87	33.87	17.27
3x4P	15.09	24.70	21.90	38.90	22.30
3x5P	20.12	29.73	26.93	43.93	27.33

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1.5:1	1 of 1	5.03mm PITCH HOUSING	
DRAWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
A1	CHANGE THE DRAWING	2021.05.06	DRAWING NO. C5030HMB-3xXP	
A0	NEW RELEASE	2015.04.10		
REV	DESCRIPTION	DATE		
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			REV A1	