

Ordering Information:

C5030HMB-XP - ***

1 2


1.Part NO.

2. Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

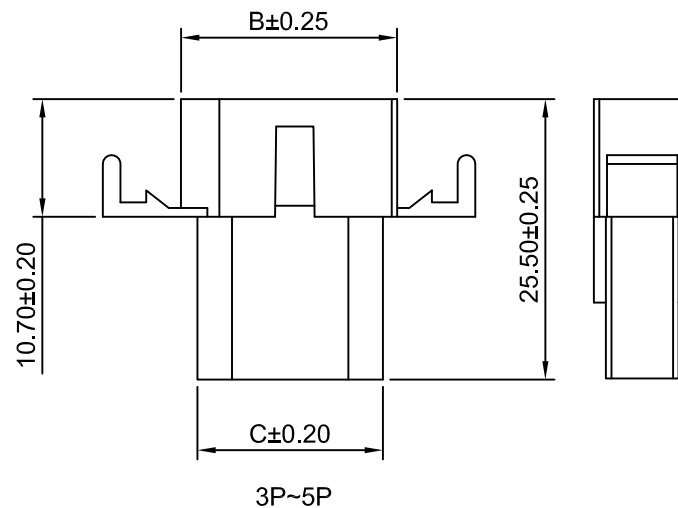

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	6.30	16.30	13.60
3P	10.06	19.64	17.04

Circuits	Dimensions(mm)		
	A	B	C
4P	15.09	24.67	22.07
5P	20.12	29.70	27.10

CJT CONSTRUCTION

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
Draw BY: YanKing		Approved : GONGYB

Title :

5.03mm PITCH

HOUSING

A0	NEW RELEESE	2015.04.10
REV	DESCRIPTION	DATE

General Tolerance	
-------------------	--

	$x \cdot x \leq 0.25$
--	-----------------------

x.xx ≤ 0.20
x.xxx ≤ 0.15

ANGLE±



DRAW NO : C5030HMB-XP

REV	
A0	