







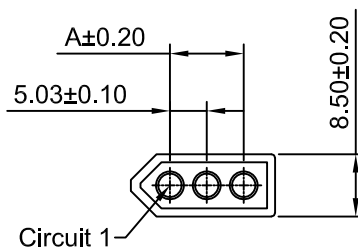


2P

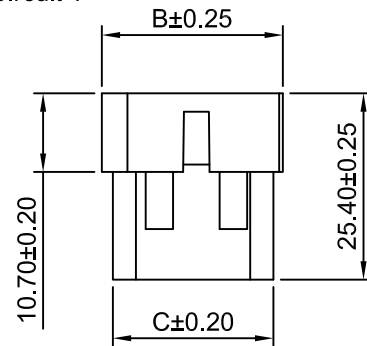

3P.5P

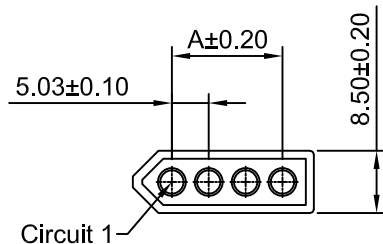

4P



Ordering Information:

C5030HMC-XP - **
1 2

1.Part No.

2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

SPECIFICATIONS:

Current Rating:12A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	6.30	16.30	13.70	4P	15.09	24.67	21.90
3P	10.06	19.64	16.87	5P	20.12	29.70	26.93

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1:1	1 of 1

Draw By:	Approved :
Djankui Wan	Jack Yin

General Tolerance

A1	ADD THE DRAWING OF 4P	2019.07.18
A0	NEW RELEASE	2015.04.10
REV	DESCRIPTION	DATE



Title :

5.03mm PITCH
HOUSING

DRAW NO : C5030HMC-XP

REV
A1