

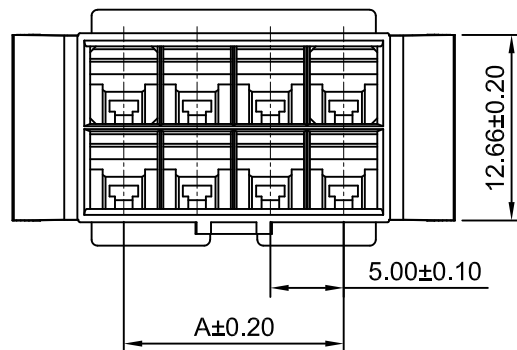
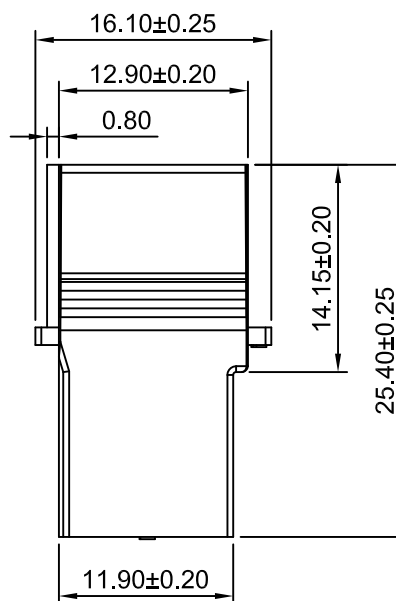


2x1P

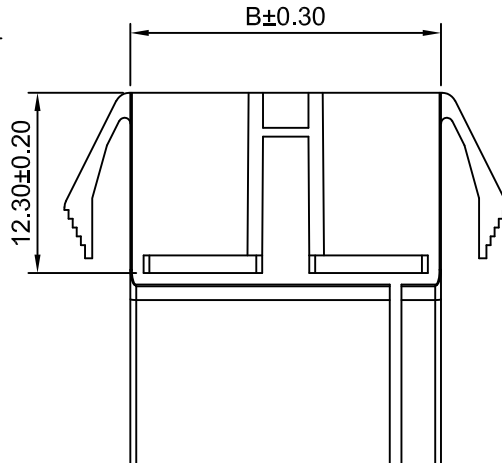

2x2P~2x8P

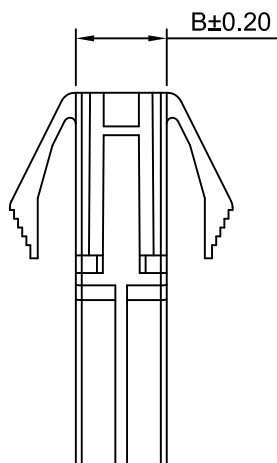

Ordering Information:
C5030HMD-XP - ** - **
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:



(blank):White

BK:Black

RD:Red

BL:Blue

YL:Yellow



SPECIFICATIONS:

Current Rating:10A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	5.00	6.20	2x6P	25.00	31.20
2x2P		11.20	2x8P	35.00	41.20
2x4P		21.20			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:	Approved :	
YanKIng	GONGYB	

Title :

5.00mm PITCH

Dual Row HOUSING

A0	NEW RELEASE	2019.08.07
REV	DESCRIPTION	DATE

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : C5030HMD-2xXP

REV
A0