

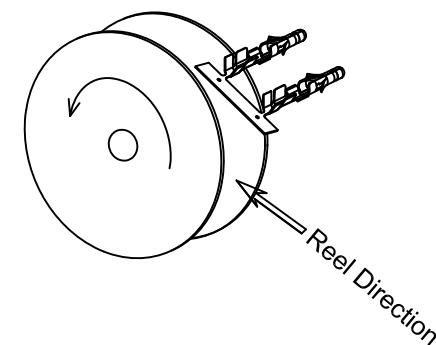
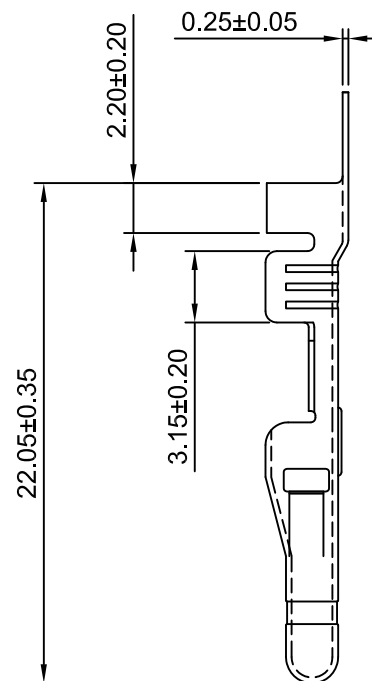


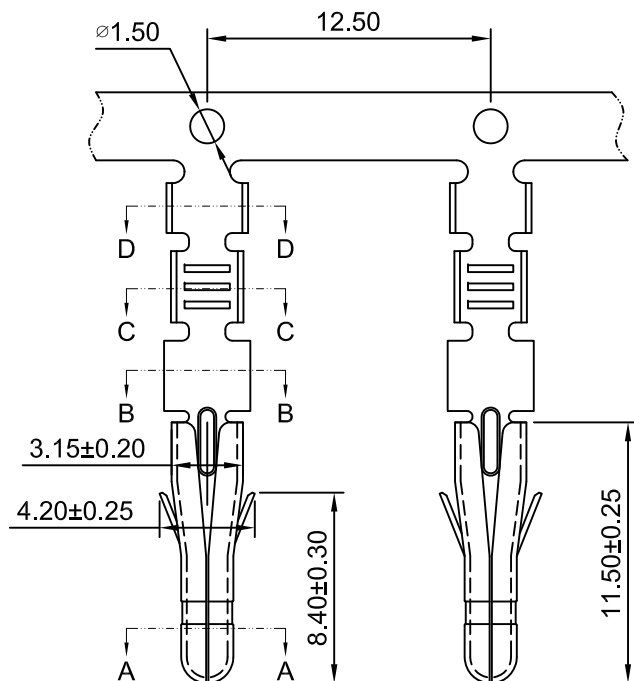


Winding Direction

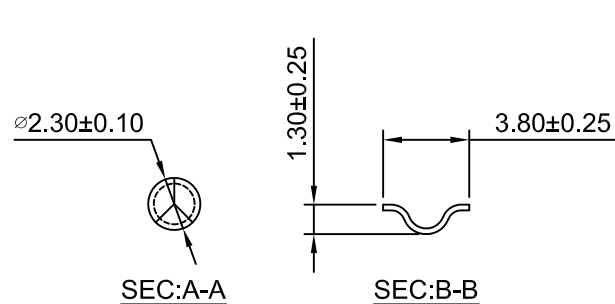


SEC:A-A

SEC:B-B



SEC:C-C



SEC:D-D

Ordering information & Specifications

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C5030M-TB	AWG#18-#24	3.10mm(max)	Brass	Tin over Nickel	5,000 PCS
C5030M-TP	AWG#18-#24	3.10mm(max)	Phosphor Bronze	Tin over Nickel	5,000 PCS
C5030M-GB	AWG#18-#24	3.10mm(max)	Brass	Gold over Nickel	5,000 PCS
C5030M-GP	AWG#18-#24	3.10mm(max)	Phosphor Bronze	Gold over Nickel	5,000 PCS

A2	MODIFYING DRAWING	2022.03.07
A1	MODIFYING DIMENSIONS	2015.11.10
A0	NEW RELEASE	2012.11.16
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 5.03mm PITCH CRIMP TERMINAL
mm	3:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C5030M-T
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			REV A2