
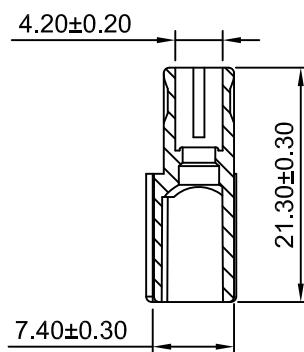
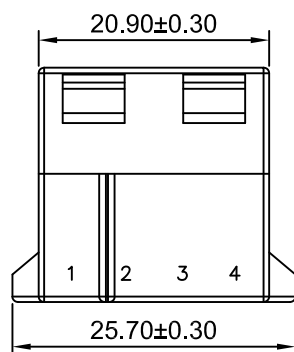
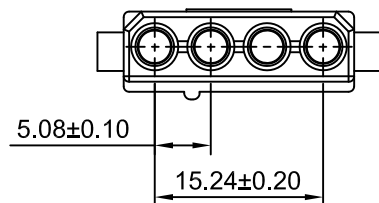
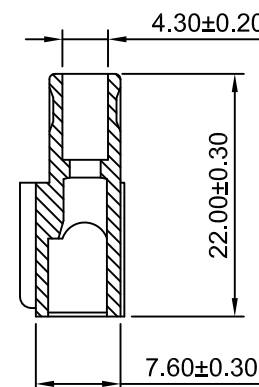
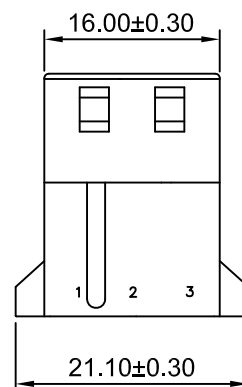
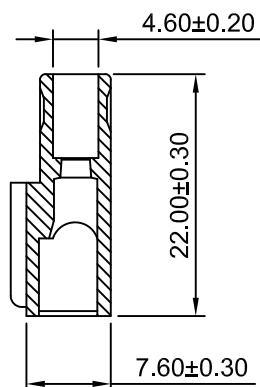
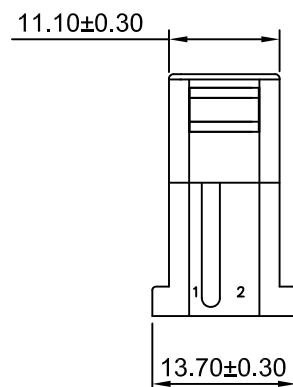





SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2(Natural)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 5.08mm PITCH HOUSING		
mm	1.5:1	1 of 1			
DRAWN	CHK'D	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin	DRAWING NO. C5081HF-XP		
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
			REV A0		

A0	NEW RELEASE	2012.09.10
REV	DESCRIPTION	DATE