

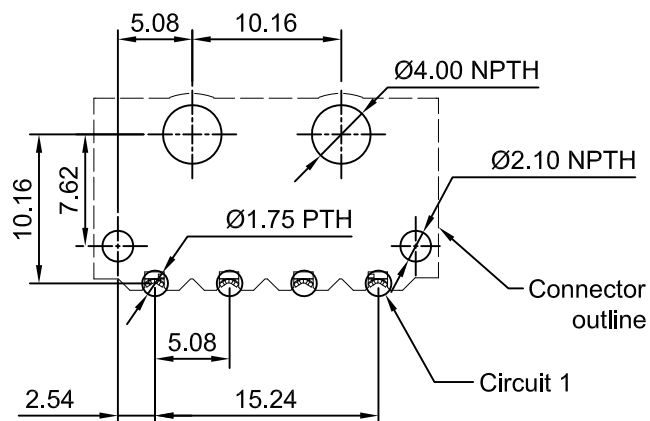
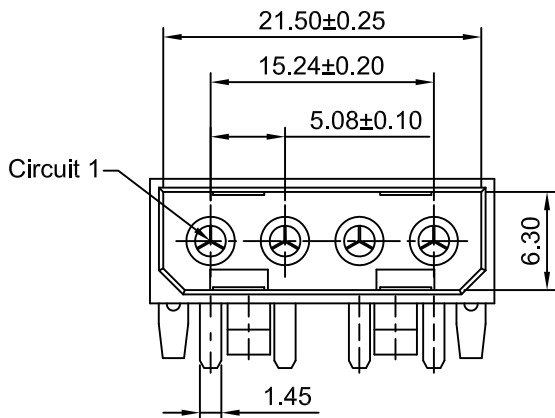


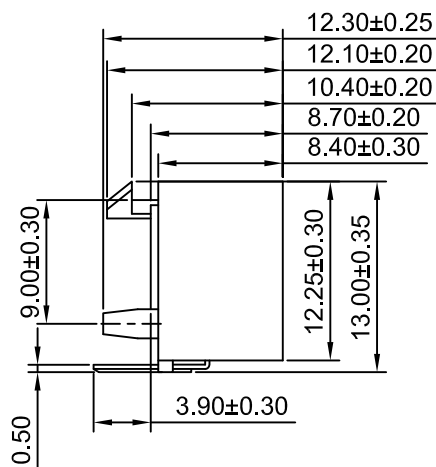

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

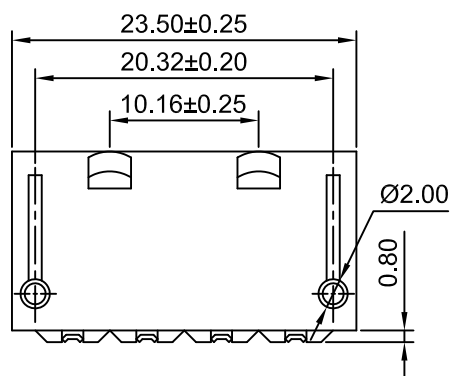

Ordering Information:

C5081WR-F-4P - *** - **

1 2 3

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-2(Natural)


V0:Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel



SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	5.08mm PITCH RIGHT-ANGLE WAFER
DRAWN	CHKD	APPR	
Hajisen Li	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
A1	CHANGE THE DRAWING	2023.05.19	
A0	NEW RELEASE	2023.04.08	
REV	DESCRIPTION	DATE	
			x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°
DRAWING NO.			REV
C5081WR-F-4P			A1