

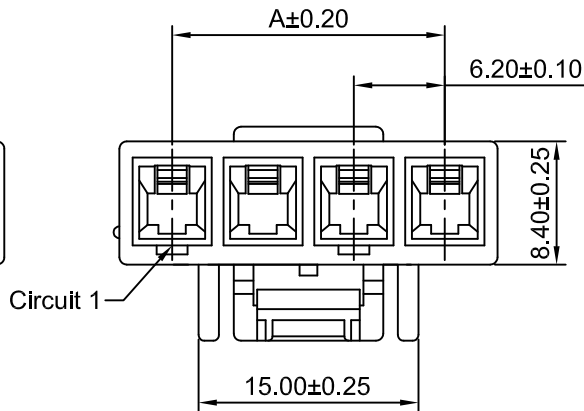





2P

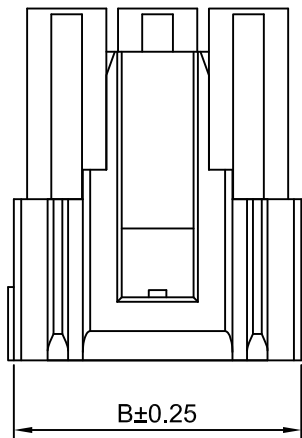

3P

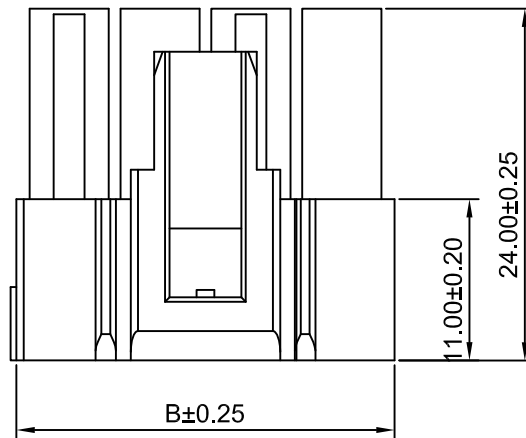

4P

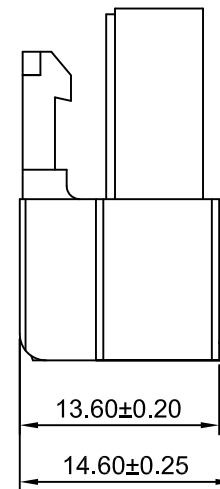

Ordering Information:

C6201HFA-XP - **
1 2

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-0(White)

V2:Nylon 66,UL94V-2(Natural)

SPECIFICATIONS:

Current Rating:20A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 7mΩMax.

Insulation Resistance: 1000MΩMin.

Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2P	6.20	15.00
3P	12.40	19.60
4P	18.60	25.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRAWN	CHK'D	APPR	6.20mm PITCH HOUSING	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
A1	CHANGE THE DRAWING	2023.05.23		
A0	NEW RELEASE	2015.04.23		C6201HFA-XP
REV	DESCRIPTION	DATE		

REV
A1