
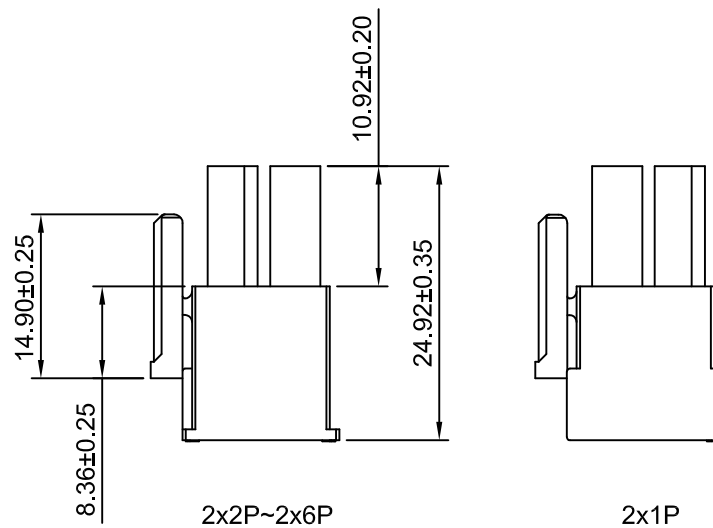
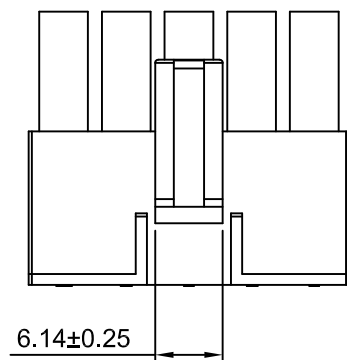

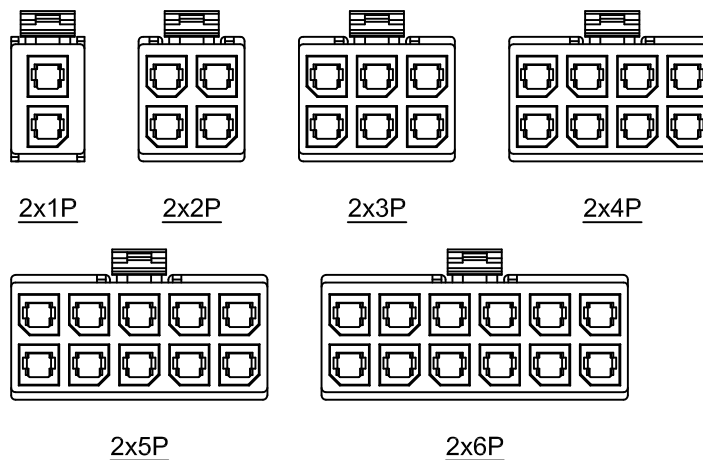


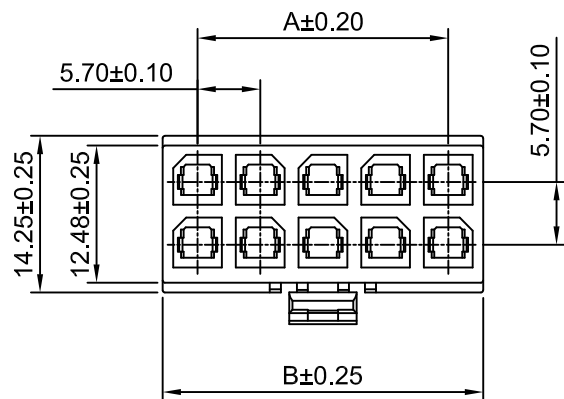

SPECIFICATIONS:

Current Rating: 23A AC,DC (Max.)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +120°C
Contact Resistance: 10mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2200V AC/minute
Material: Nylon 66, UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6201HFB-2x1P	---	8.35
C6201HFB-2x2P	5.70	12.05
C6201HFB-2x3P	11.40	17.75
C6201HFB-2x4P	17.10	23.45
C6201HFB-2x5P	22.80	29.15
C6201HFB-2x6P	28.50	34.85

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	5.70mm PITCH HOUSING
DRWN	CHK'D	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	DRAWING NO. C6201HFB-2xXP
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A4

A4	CHANGE THE DRAWING	2022.03.31
A3	MODIFY DRAWING	2021.05.12
A2	CHANGE THE CURRENT RATING	2019.02.22
A1	CHANGE THE DRAWING	2018.11.29
A0	NEW RELEASE	2015.04.23
REV	DESCRIPTION	DATE