

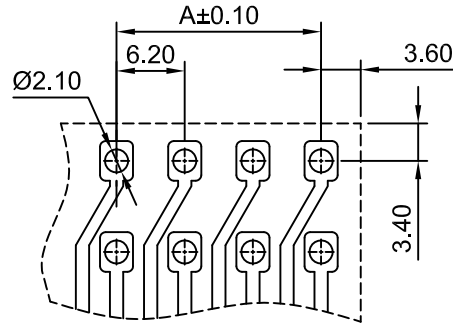

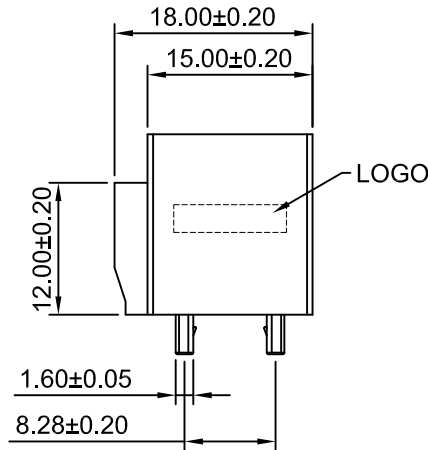


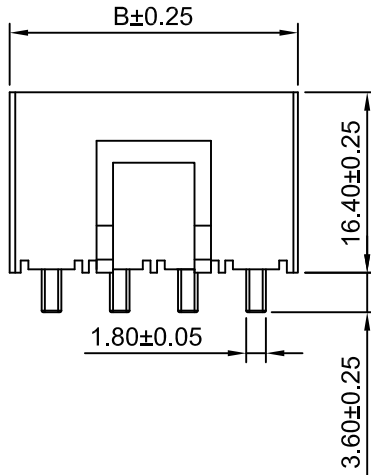

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

C6201WV-2xXP - *** - *** - ** - *

1.Part NO.

2.Housing Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Pin Material:

(Blank): Phosphor Bronze

HCS: Copper Alloy

4.Color:

(Blank): see section 2 Material

BK: Black BL: Blue

RD: Red UV: Ultraviolet

5.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating:23A AC,DC(2 Circuits/AWG#12)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 7mΩMax.

Insulation Resistance: 1000MΩMin.


Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
C6201WV-2x2P	6.20	13.40
C6201WV-2x3P	12.40	19.60
C6201WV-2x4P	18.60	25.80
C6201WV-2x6P	31.00	38.20



2x2P



2x3P

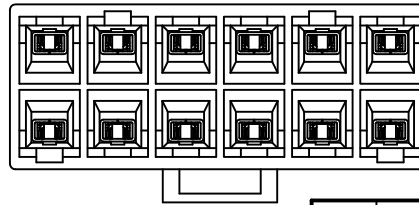

2x6P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		1:5:1		1 of 1			
DRAWN		CHK'D		APPR		6.20mm PITCH VERTICAL DUAL ROW HEADER	
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO. C6201WV-2xXP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
						REV A3	