

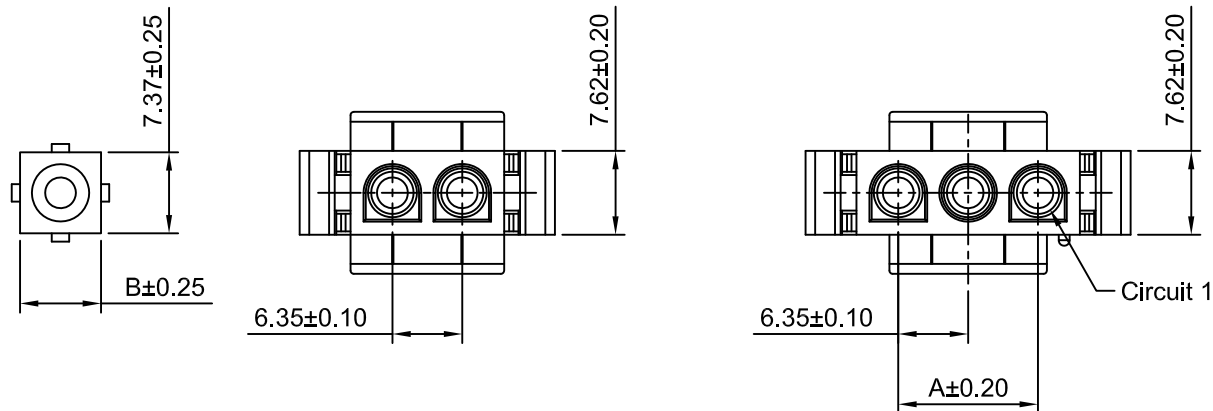


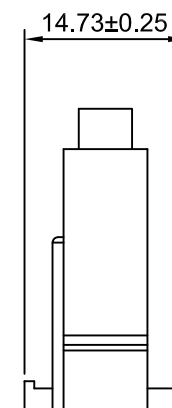
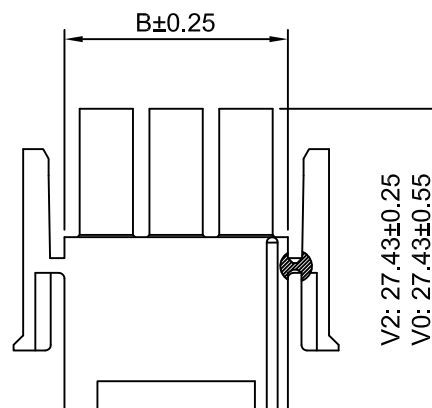





1P

2P

3P~10P



Ordering Information:

C6351HF-XP - ** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

BR: Brown RD: Red

OR: Orange YL: Yellow

GN: Green BL: Blue

GY: Gray BK: Black

4.Logo & Marking:

(Blank): With Mark

NK: Without Mark

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351HF-1P	---	7.37
C6351HF-2P	6.35	13.97
C6351HF-3P	12.70	20.32
C6351HF-4P	19.05	26.67
C6351HF-5P	25.40	33.02
C6351HF-6P	31.75	39.37
C6351HF-7P	38.10	45.72
C6351HF-8P	44.45	52.07
C6351HF-9P	50.80	58.42
C6351HF-10P	57.15	64.77

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Dlankul Wan	Jack Yin	
General Tolerances	THIRD ANGLE PROJECTION		6.35mm PITCH SINGLE ROW HOUSING
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			
DRAWING NO.			REV A2
C6351HF-XP			

A3	ADD -NK TYPE	2021.02.03
A2	CHANGE THE INFORMATION	2020.08.31
A1	CHANGE THE DRAWING	2019.06.12
A0	NEW RELEASE	2015.04.25
REV	DESCRIPTION	DATE